



INSTALLATION AND INSTRUCTION MANUAL OF FLAT ROOF FRAME (CLASSIC U) (3 COLLECTORS)



1. general installation instructions

Before the installation of the solar unit please read all the information and instructions in the present manual.

In accordance with the final user of the unit please consider all the details that will ensure safe and proper installation. Such details are the selection of position, the orientation, the layout of the pipes, the suitable surface etc.

The position must not be shaded during the whole year by trees or other obstacles.

The installation should comply with the local electrical and plumbing regulations.

For optimal efficiency the unit should face South for the North hemisphere and vice versa for the South Hemisphere. In case this is not absolutely possible it can be positioned 30° to the East if DHW demand is before 14:00 or it can be positioned 30° to the West if DHW demand is after 14:00. In both cases the loss of thermal gain will not be greater than 6% annually.

If the unit is to be placed on a roof with inclination angle less than 15° or more than 30° then a special equipment other than the standard support frame must be used. This special equipment is similar to the one used in areas that suffer storms extremely strong wind and hurricanes (Windy Set)

For tilted roof installation it is absolutely essential that the frame should be positioned ensuring that the water tank is exactly over a horizontal post and never between two posts.

If the surface on which the unit will be installed is not compatible with the standard equipment provided then a different equipment should be used.

This equipment should be suggested, chosen and installed by the installer in accordance with the final user.

When the unit is to be installed on a tilted roof the brackets must be tighten down with suitable bolts that ensure a proper and safe installation.

In areas of high snowfall extra care must be shown that the snow is not trapped behind the water tank and that the standard frame is capable withstanding the expected weight of snow.

The same care must apply to areas that suffer heavy storms, extremely strong wind and hurricanes. In such areas use the Windy Set.

Both the pipes of the solar unit and the pipes of cold and hot water to the building must be properly insulated.



Only skilled technicians must perform the filling and connecting of the closed circuit. Before the filling of the closed circuit with thermal fluid the water tank must be completely filled with water.


After the installation of the unit clean-up the surrounding area. Fill the guarantee form and mail it to the manufacturer or the local distributor.

The manufacturer is not responsible in any way for damages caused to the product or others due to wrong installation.

Installation Kit
3 solar thermal collectors

	A 2 items		E 1 item		J 2 items
	B 2 items		K 1 item		M 1 item
	D 1 item		F 1 item	 N 1 item <u>Optional equipment</u> <u>(not included)</u>	

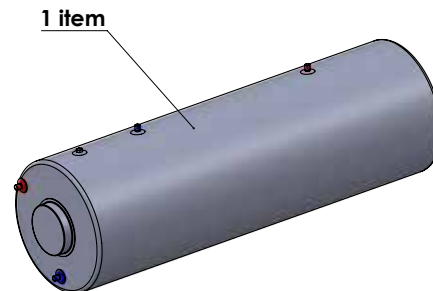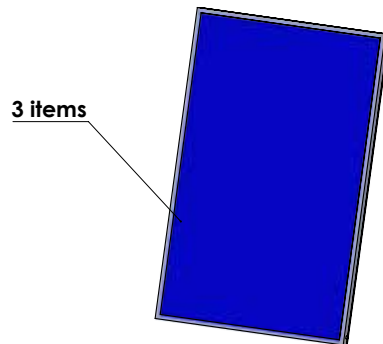

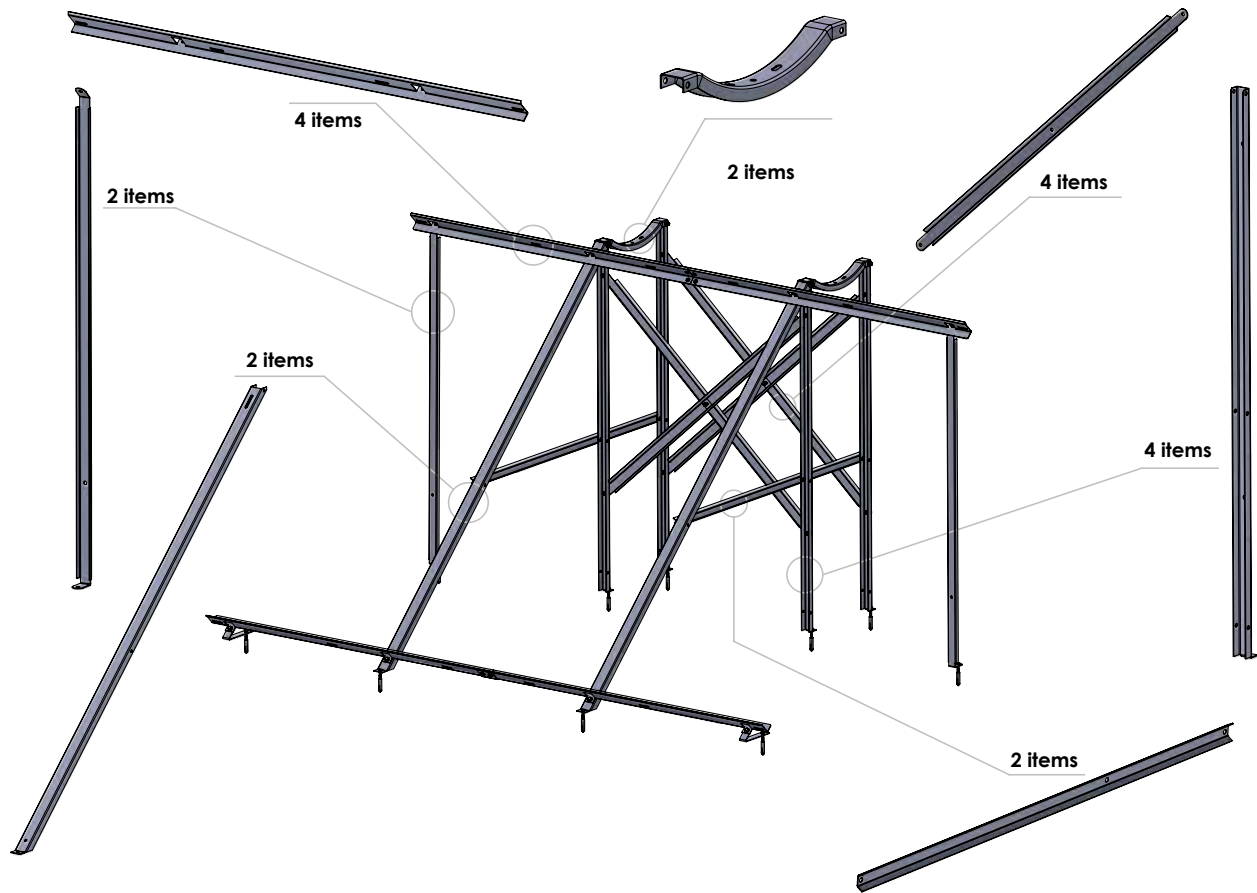



Hexagon head bolt
M8x70mm
2 items



Hexagon head bolt
M10x70mm
2 items



Hexagon head bolt
M8x20mm
26 items



Washer M8
54 items



Safix Plastic 8mm plug
10 items



Hexagon head wood screws
DIN 571 A4 Φ8x60mm
10 items



Hexagon nut M8
34 items



Hexagon nut M10
2 items



Hexagon head bolt
M8x16mm
12 items





Washer M10
4 items



Hex socket head
M8x16mm
8 items



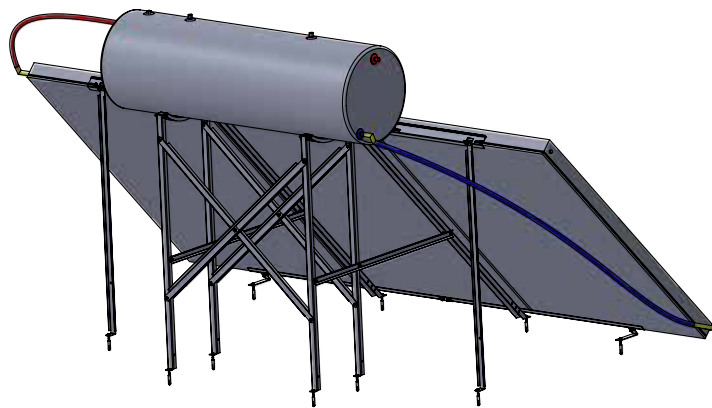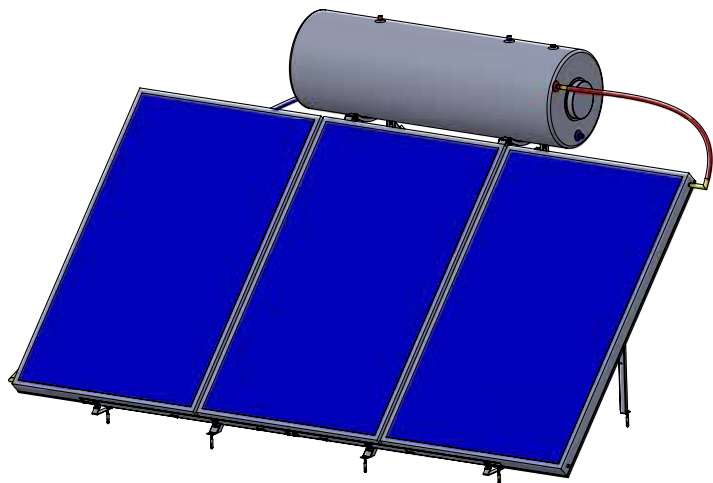


Assembly step 1
x2

Hexagon head bolt
M8x70
1 item


Hexagon nut M8
3 items

Washer M8
4 items

Hexagon head bolt
M8x20
2 items

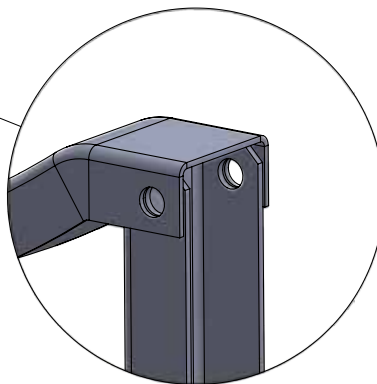

Assembly step 2
x2

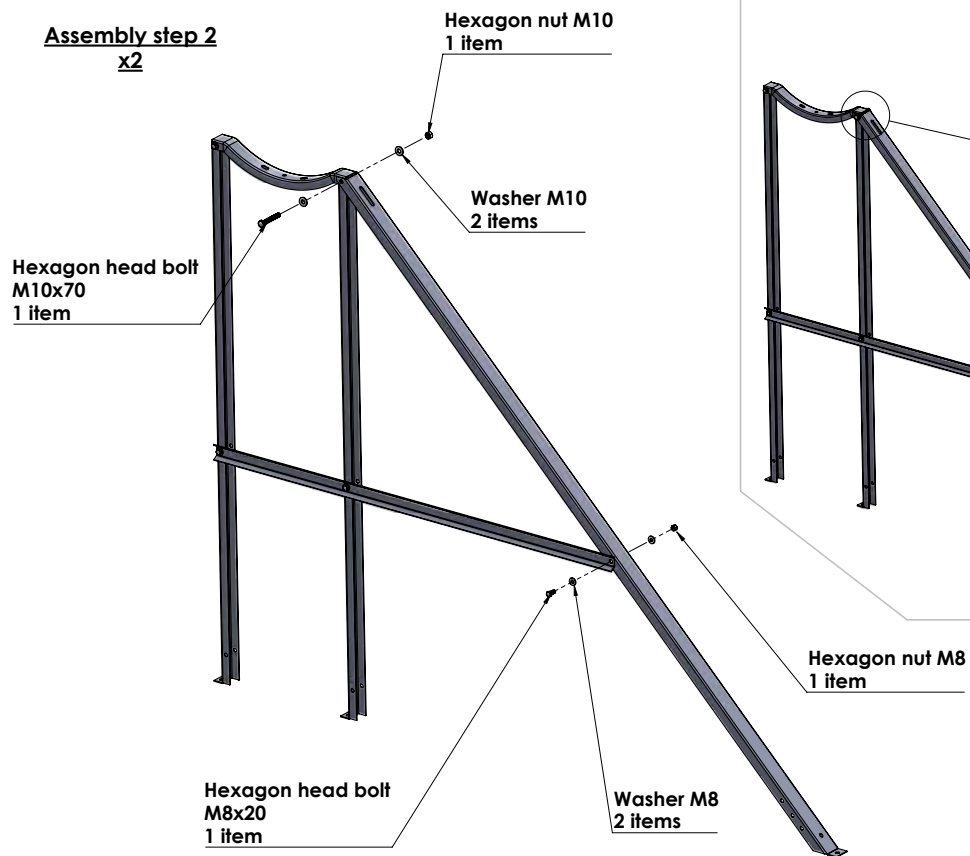

Assembly step 3

Hexagon nut M8
5 items

Hexagon head bolt
M8x20
5 items





Assembly step 4

Hexagon head bolt
M8x20
5 items

Hexagon nut M8
5 items



Assembly step 5
x2

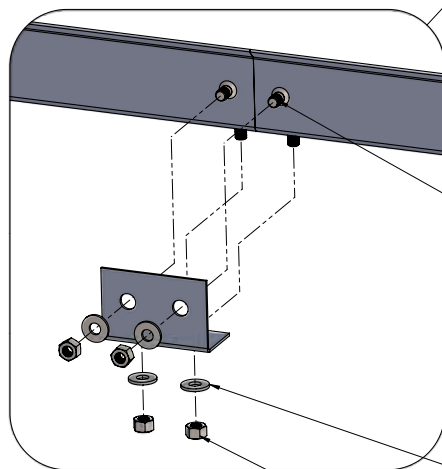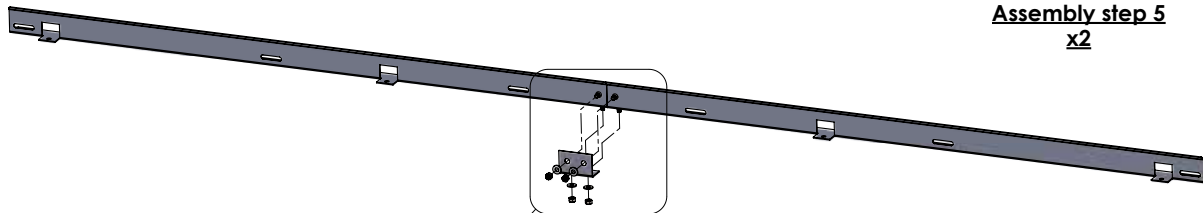


**Hexagon socket head
M8x16
4 items**


**Washer M8
4 items**

**Hexagon nut M8
4 items**


Assembly step 6

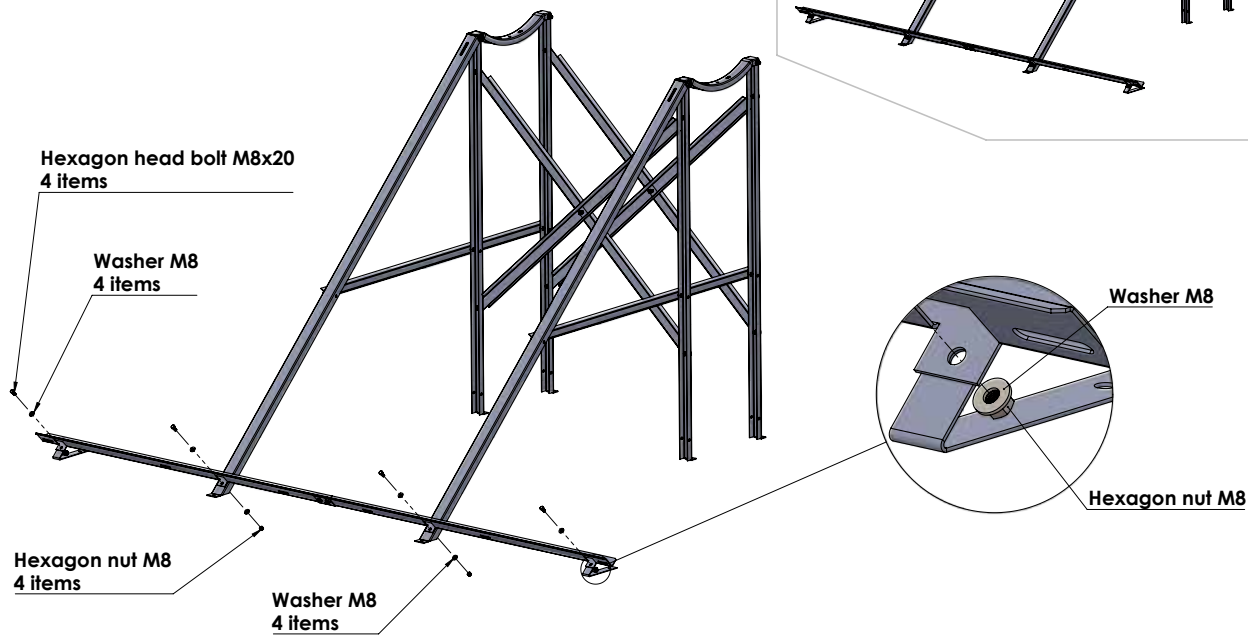

Assembly step 7

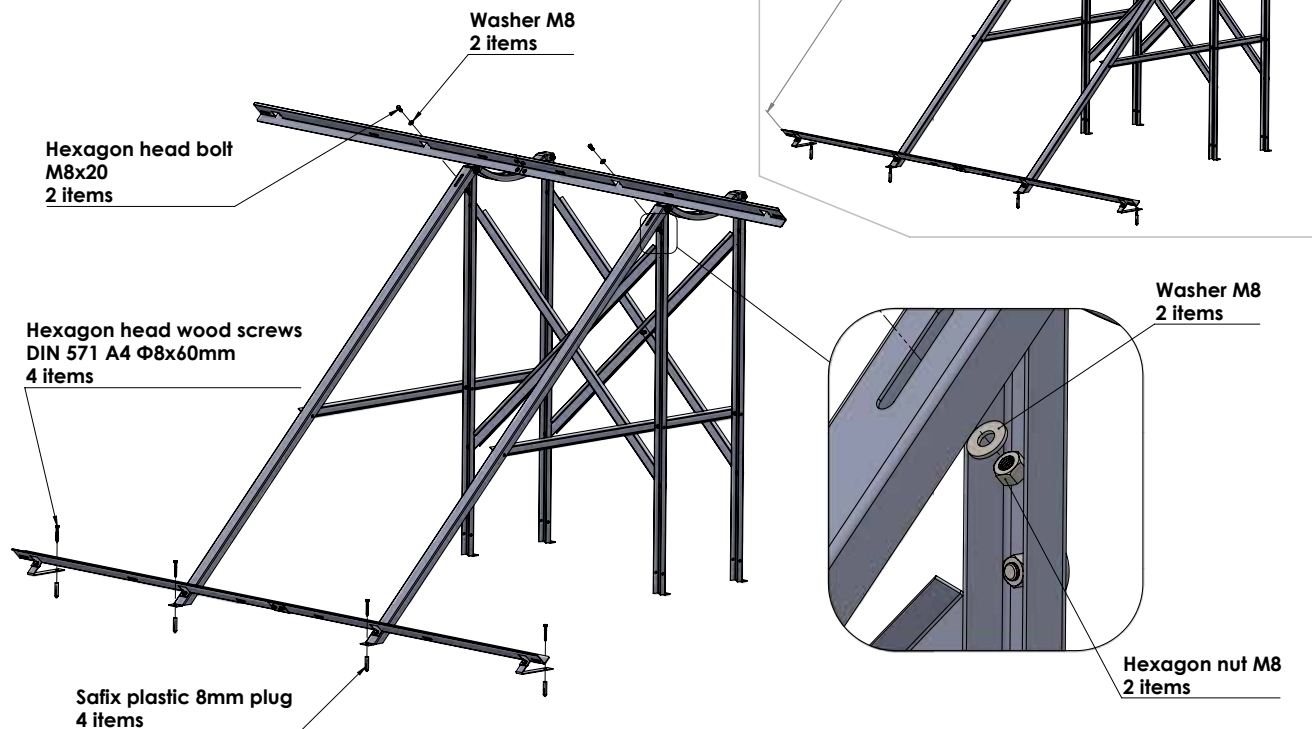

Assembly step 8

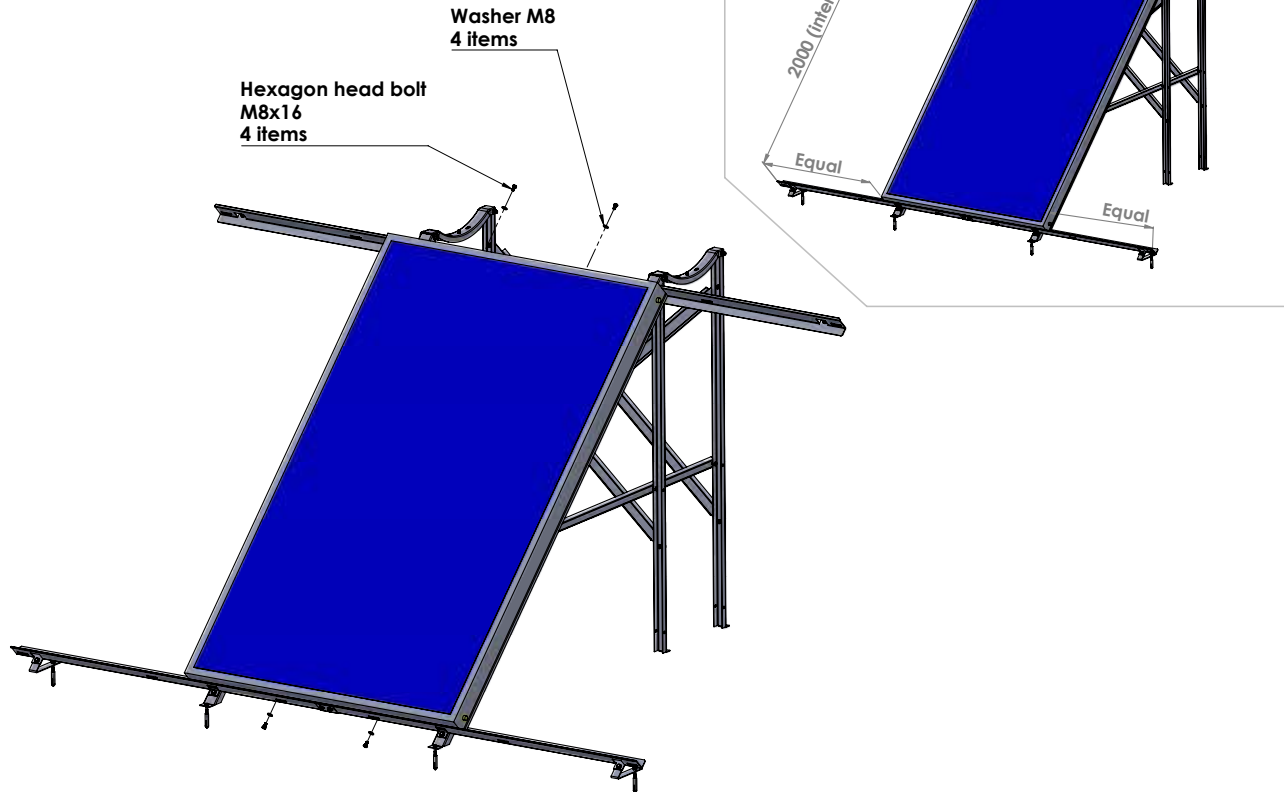


Assembly step 9

Hexagon head bolt
M8x20
2 items

Washer M8
2 items

Washer M8
2 items

Hexagon nut M8
2 items

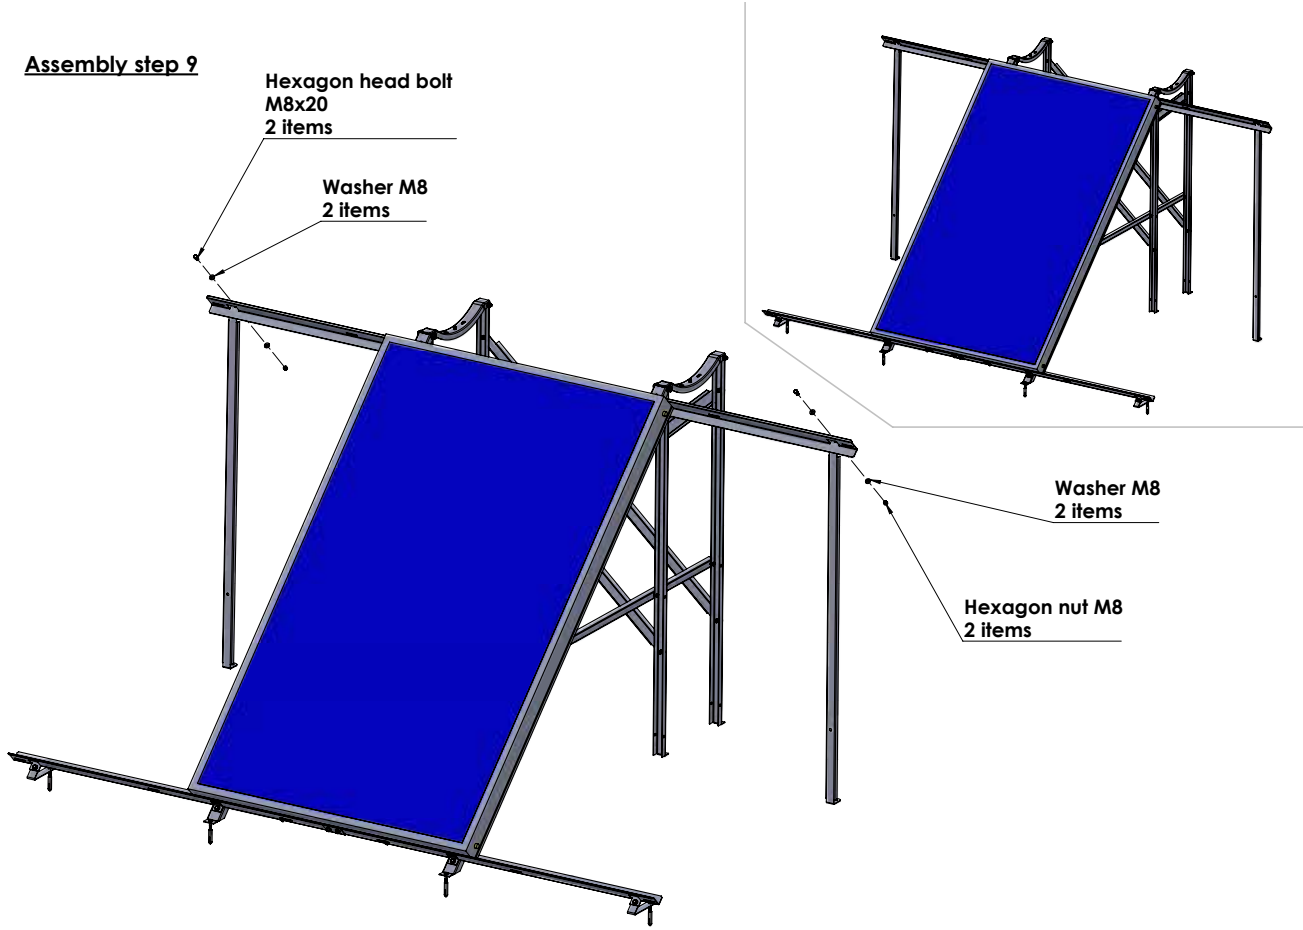


Assembly step 10




Hexagon head bolt
M8x16
8 items


Washer M8
8 items

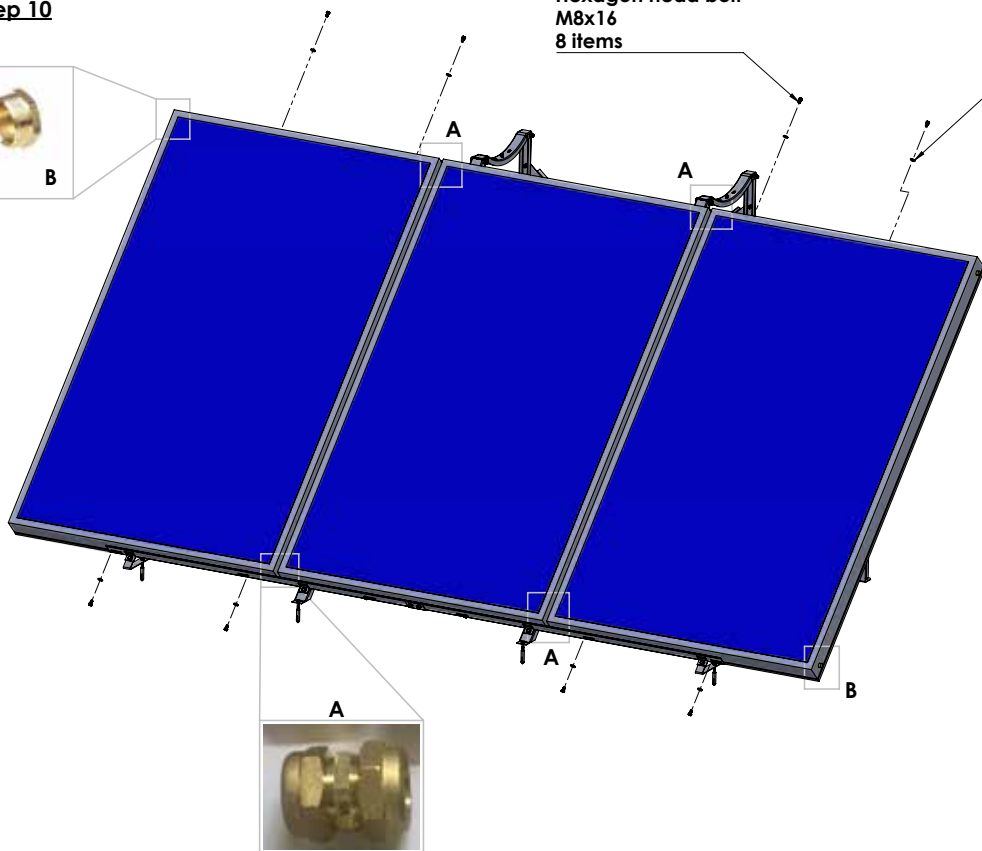

Assembly step 11



18

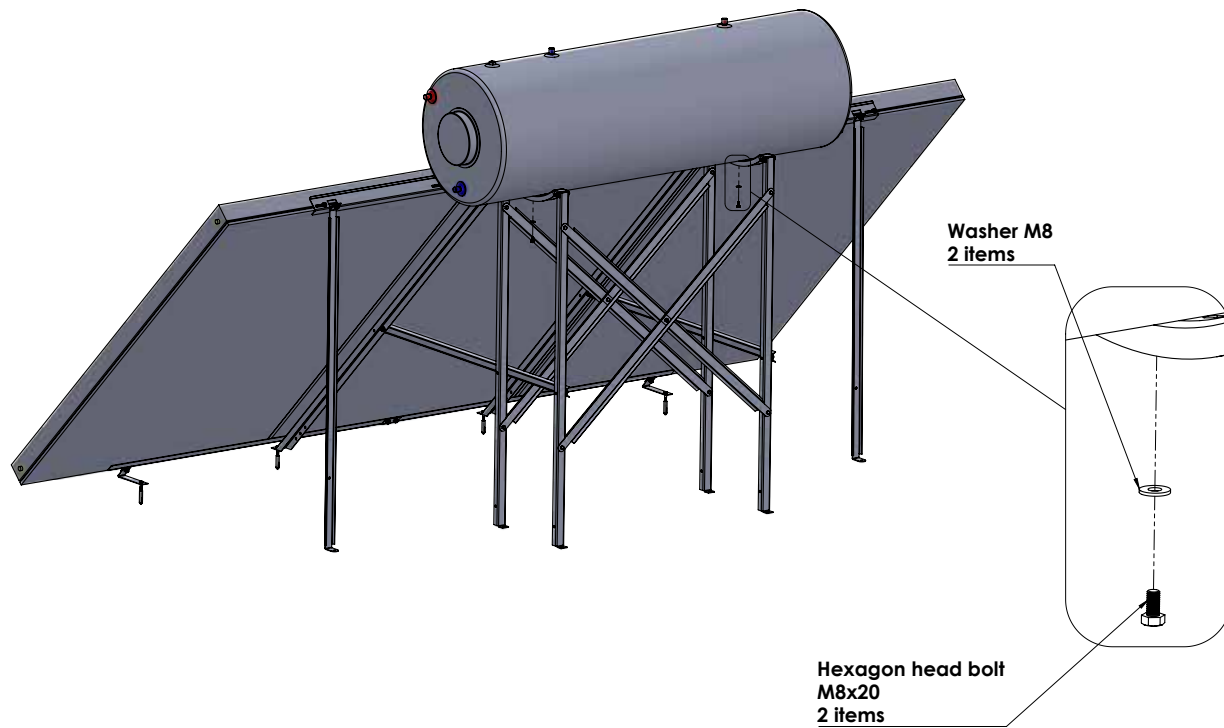

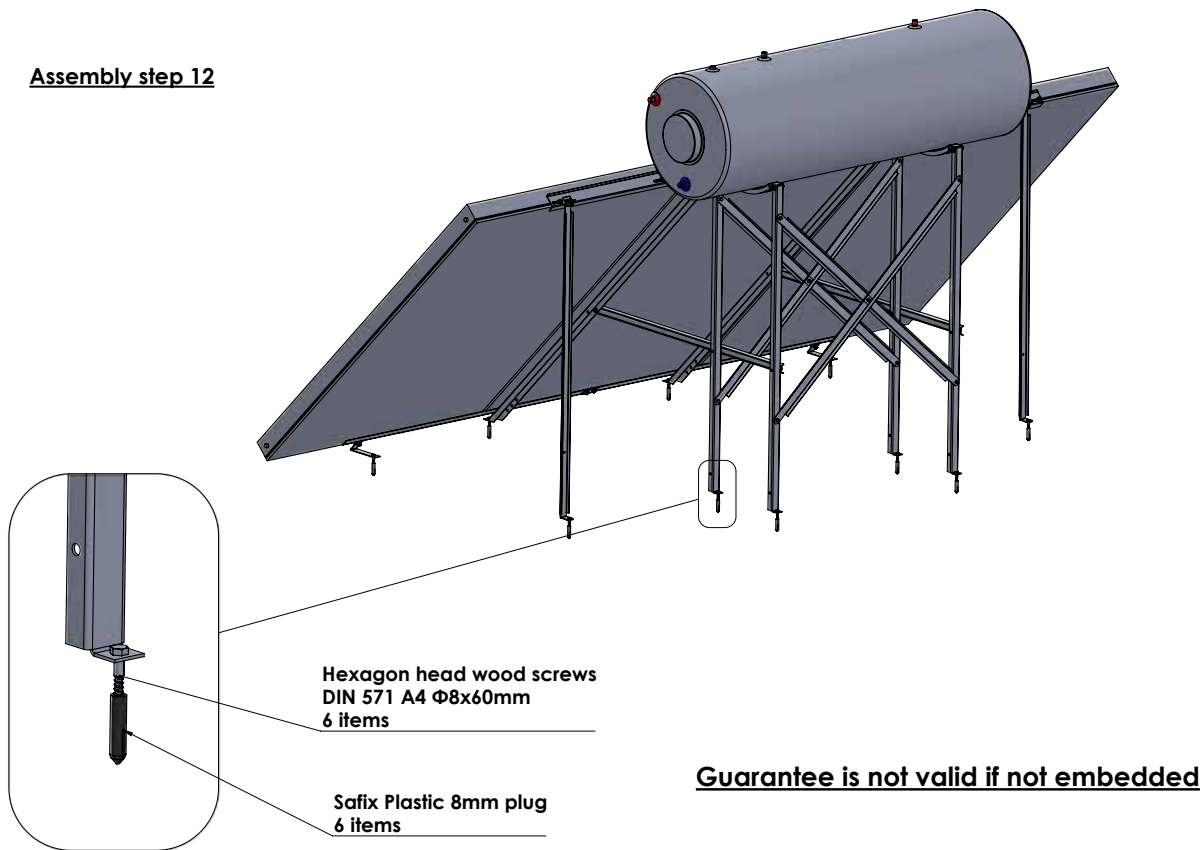Assembly step 12


Assembly step 13

Hot water outlet
G3/4

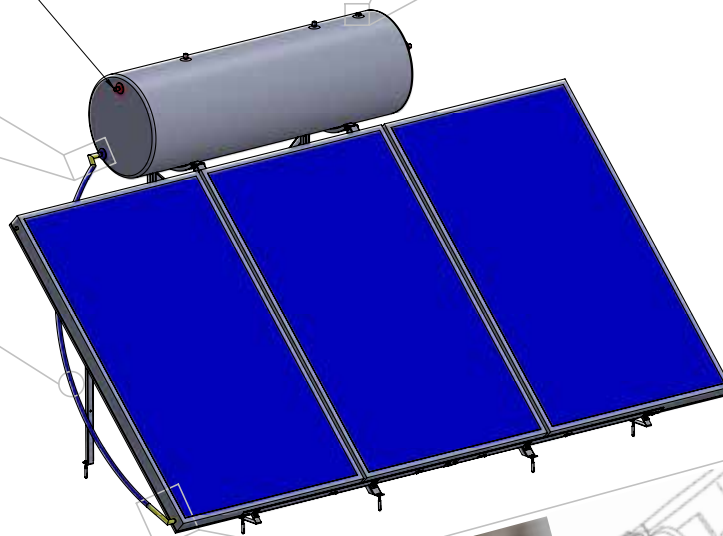


Optional equipment (not included)

If continuous high temperatures are expected, due either to oversizing of collectors for the actual location or location's climatic data, on the primary (solar) circuit, the use of thermostatic relief valve is mandatory (not included in the SWH set). Guarantee is not valid if not installed.



Assembly step 14

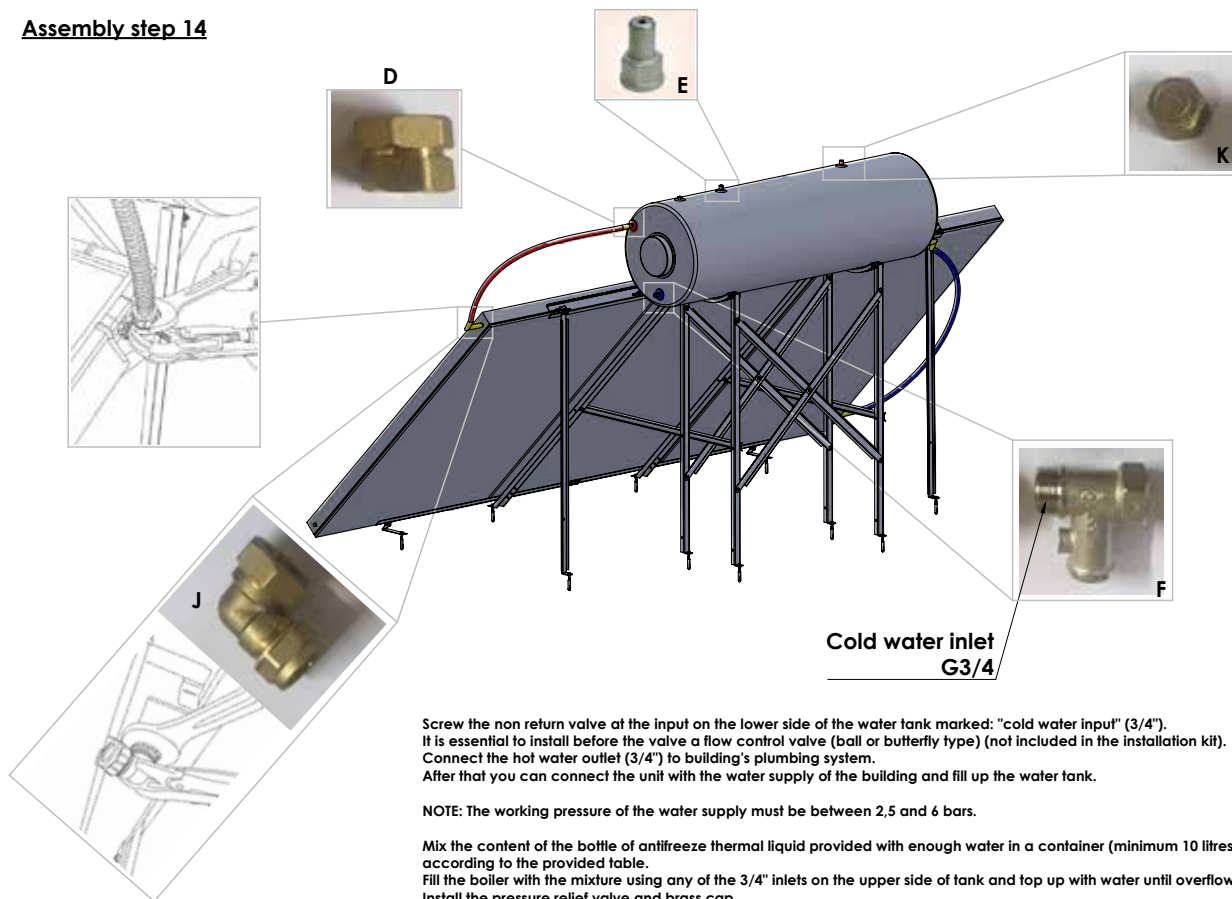

Screw the non return valve at the input on the lower side of the water tank marked: "cold water input" (3/4"). It is essential to install before the valve a flow control valve (ball or butterfly type) (not included in the installation kit). Connect the hot water outlet (3/4") to building's plumbing system. After that you can connect the unit with the water supply of the building and fill up the water tank.

NOTE: The working pressure of the water supply must be between 2,5 and 6 bars.

Mix the content of the bottle of antifreeze thermal liquid provided with enough water in a container (minimum 10 litres of water) according to the provided table.

Fill the boiler with the mixture using any of the 3/4" inlets on the upper side of tank and top up with water until overflows. Install the pressure relief valve and brass cap.

4. table of proportion and antifreeze protection

% vol.	Frost protection [°C]
25	-10 °C
30	-14 °C
35	-17 °C
40	-21 °C
45	-26 °C
50	-32 °C
55	-40 °C

5. THERMOSIPHONIC SYSTEM Instructions and maintenance.

General instructions and maintenance

- The system will reach optimum performance two days after installation.
- We recommend to inspect the glass cover of the collectors periodically ,clean them in case there is dust or snow or anything else that might interfere the solar rays, see any cracks on the surface and replace it as soon as possible if you see any possible damage.
- Check the antifreeze liquid of the circuit at least once per year and add the necessary quantity to fill the system.
- Check at least once per year the all valves ,check if any bolts and nuts are well screwed and generally check the stability of the support frame.
- If you decide to leave the house for a long period ,cover the collectors ,it is essential for the well being of the circuit.
- Check periodically for any leaks ,any bended tubes ,air bubbles trapped in the system ,check if all tube connections are in the proper exits and inlets.

Electrical resistance

- Check for obvious damage of the electrical element with thermostat.
- Check the wiring connection of the resistance and the thermostat.
- Check if the thermostat is placed in the proper temperature ,temperature should not exceed 75° C. The factory adjustment is 65° C.
- Check if main supply reaches the element.
- Always turn the power off before you start repairing the electrical parts of the system.

Magnesium bar (anode)

- Before checking or replacing the anode turn the power off.
- Empty the water from the tank.
- Unscrew the resistance tap.
- Remove the thermostat from the element.
- Unscrew the flange carefully.
- Unscrew the anode ,check or replace the bar back in position.
- Place back the flange and follow the procedure vice versa.
- Refill the tank.
- Switch the power back on.

Lightning protection

The collectors should always be connected (the metallic parts) through a copper conductor 16mm with the lightning conductor system, if there is any, if not the collectors should be connected with any conductor system using the same copper conductor from the collectors.

The conductor shouldn't go through the inner space of the house and it should be installed by a certified electrician.

Collectors are installed on top of a metallic support base and the installer should check if the collector is attached with a secure manner, checking all the bolts and screws if they are well placed.

Always call a certified installer to do the proper maintenance of the system, in case there is an electrical issue please call a certified electrician.

Guarantee terms and Limitations

Guarantee is valid when below mentioned water quality characteristics are fulfilled:

- Saturation Index (Langelier) : $LSI > 0,1$
- Corrosivity Index (C.I.) : $0,5 < C.I. < 3$
- Where $C.I. = \frac{c(Cl) + c(NO_3) - 2c(SO_4^{2-})}{c(HCO_3)}$ and $c(HCO_3) \geq 2,0 \text{ mmol/l}$
In such case magnesium anode rod should be replaced annually.
- When $C.I. > 3$, then guarantee is limited to two years given the magnesium anode rod is replaced every six months.
- For stainless steel tanks: Guarantee is valid whereas the water in use has chlorine saturation 200 mg/l maximum ($c(Cl^-) < 200 \text{ mg/l}$)
- In areas where water has a saturation from 54 to 90 mg/l $CaCO_3$ it is recommended the use of water softener device to avoid calcium carbonate and other scale deposition. In case saturation is more than 90 mg/l $CaCO_3$ then installation of such device is mandatory.

General Terms:

1. Guarantee time is considered starting with installation and commissioning of the appliance.
2. Electric heating element and thermostat are covered for two year period.
3. Damages caused by calamity, force major, earthquake, extreme frost are not covered.
4. Damages caused by misuse, wrong installation, wrong electrical wiring are not covered.
5. Guarantee is not valid in case the appliance is installed or serviced by unauthorized personnel.
6. All parts used for maintenance and/or repair should be Original Thermic Parts or approved equivalent.
7. Secondary damages caused by water leaks etc. are not recognized.
8. Claims are not covered if the guarantee document is not filled and copy sent to the manufacturer and/or the authorized local distributor or reseller.
9. Guarantee is not valid if scheduled maintenances are not performed.
10. Scheduled maintenances table below should be filled and signed. Additional proof (e.g. labor invoice) might be asked.
11. Guarantee is not valid if the used water's salinity does exceed 500 ppm
12. The time validity of the guarantee is not renewed after possible repair within the covered period
13. The guarantee is limited to the defective parts replacement and/or repair labor cost if any. Secondary losses or damages are not covered.
14. Transportation costs for defective materials, traveling and accommodation for technicians are not covered.
15. If continuous high temperatures are expected, due either to oversizing of collectors for the actual location or location's climatic data, on the primary (solar) circuit, the use of thermostatic relief valve is mandatory (not included in the SWH set). Guarantee is not valid if not installed.
16. The scheduled maintenances are mandatory for the validity of the guarantee.

1. general installation instructions

Before the installation of the solar unit please read all the information and instructions in the present manual.

In accordance with the final user of the unit please consider all the details that will ensure safe and proper installation. Such details are the selection of position, the orientation, the layout of the pipes, the suitable surface etc.

The position must not be shaded during the whole year by trees or other obstacles.

The installation should comply with the local electrical and plumbing regulations.

For optimal efficiency the unit should face South for the North hemisphere and vice versa for the South Hemisphere. In case this is not absolutely possible it can be positioned 30° to the East if DHW demand is before 14:00 or it can be positioned 30° to the West if DHW demand is after 14:00. In both cases the loss of thermal gain will not be greater than 6% annually.

If the unit is to be placed on a roof with inclination angle less than 15° or more than 30° then a special equipment other than the standard support frame must be used. This special equipment is similar to the one used in areas that suffer storms extremely strong wind and hurricanes (Windy Set)

For tilted roof installation it is absolutely essential that the frame should be positioned ensuring that the water tank is exactly over a horizontal post and never between two posts.

If the surface on which the unit will be installed is not compatible with the standard equipment provided then a different equipment should be used.

This equipment should be suggested, chosen and installed by the installer in accordance with the final user.

When the unit is to be installed on a tilted roof the brackets must be tighten down with suitable bolts that ensure a proper and safe installation.

In areas of high snowfall extra care must be shown that the snow is not trapped behind the water tank and that the standard frame is capable withstanding the expected weight of snow.

The same care must apply to areas that suffer heavy storms, extremely strong wind and hurricanes. In such areas use the Windy Set.

Both the pipes of the solar unit and the pipes of cold and hot water to the building must be properly insulated.

Only skilled technicians must perform the filling and connecting of the closed circuit. Before the filling of the closed circuit with thermal fluid the water tank must be completely filled with water.



After the installation of the unit clean-up the surrounding area. Fill the guarantee form and mail it to the manufacturer or the local distributor.









The manufacturer is not responsible in any way for damages caused to the product or others due to wrong installation.

Installation Kit
3 solar thermal collectors

	A 4 items		E 1 item		J 2 items
	B 2 items		K 1 item		M 1 item
	D 1 item		F 1 item	 <u>Optional equipment</u> <u>(not included)</u>	N 1 item

3

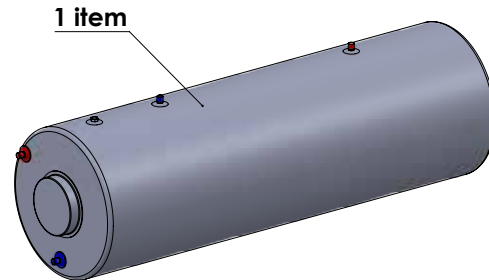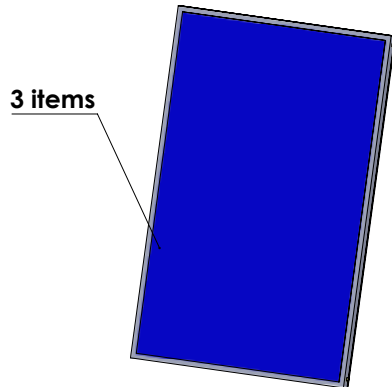



Washer M10
4 items



Hexagon head wood screws
DIN 571 A4 Ø8x60mm
8 items



Safix Plastic 8mm plug
8 items



Washer M8
116 items



Hexagon head bolt
M8x20mm
55 items



Hexagon nut M10
4 items



Hexagon head bolt
M8x16mm
12 items



Carriage bolt (DIN 603)
M10x20mm
4 items







Hex socket head
M8x16
8 items



Hexagon nut M8
63 items



5

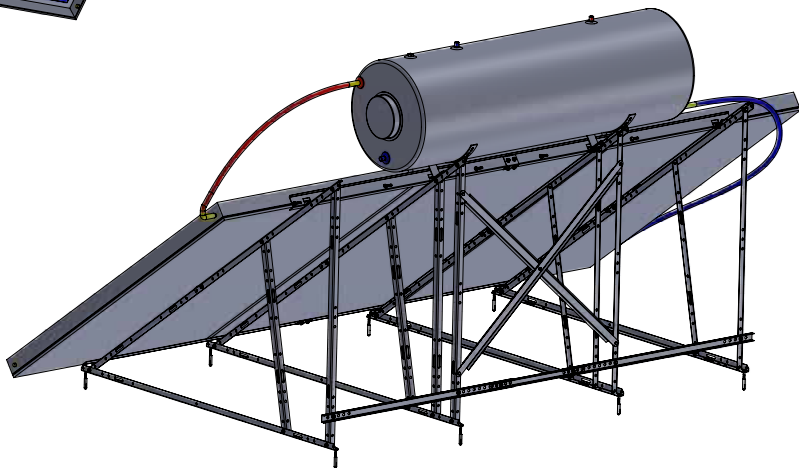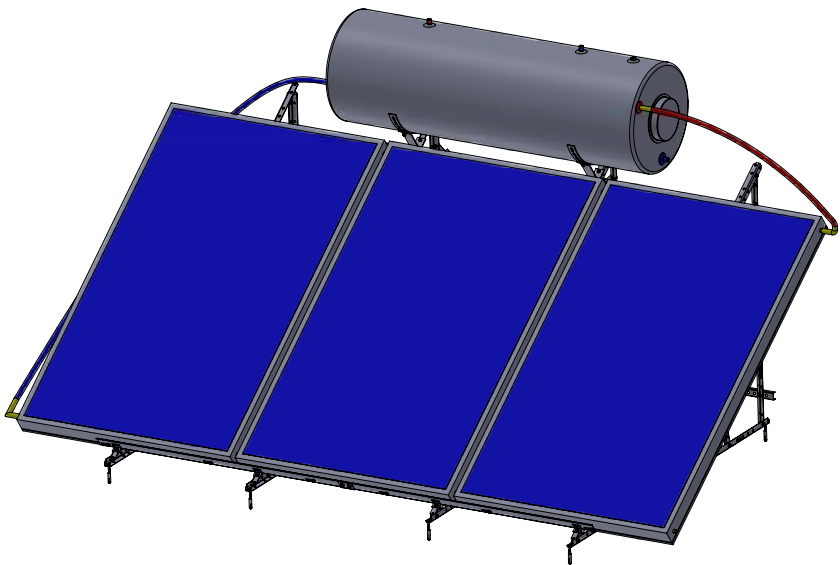

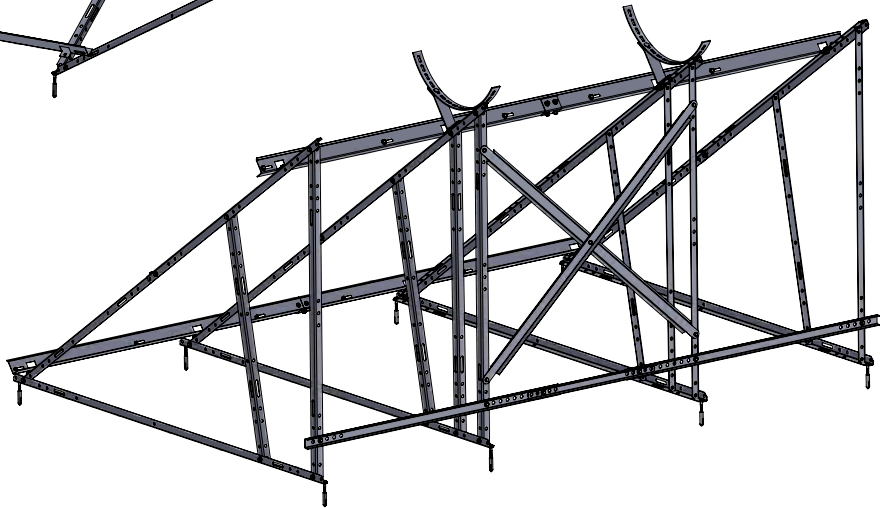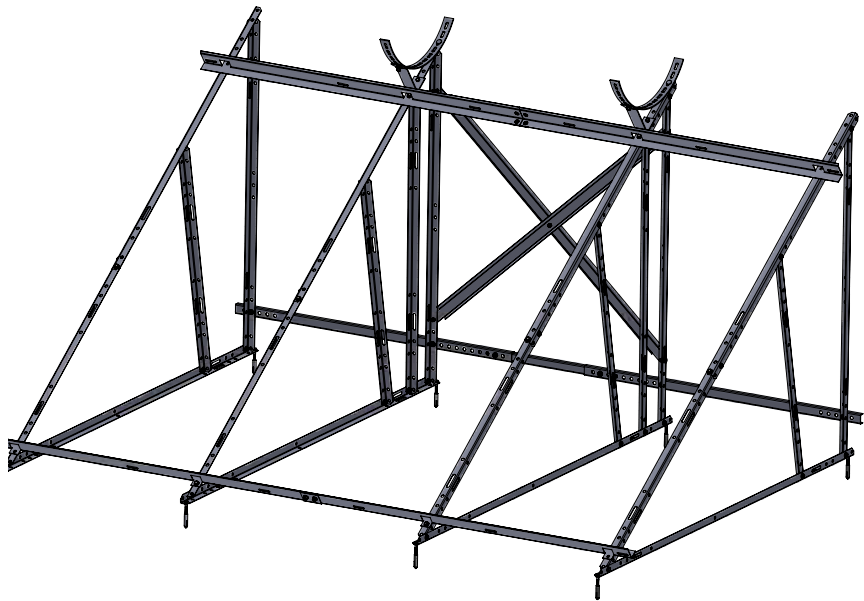


Main parts of the support frame


7

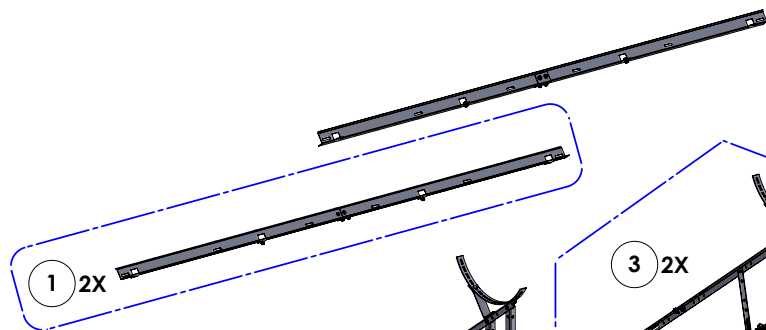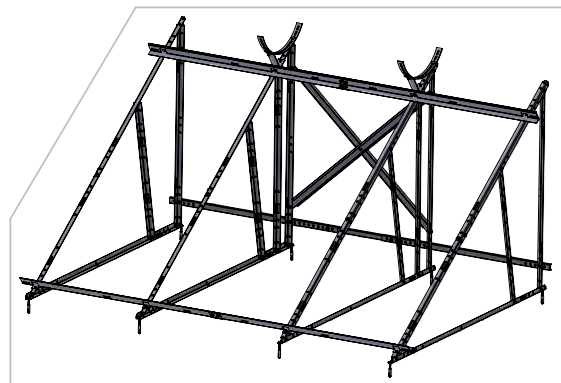


1 2X

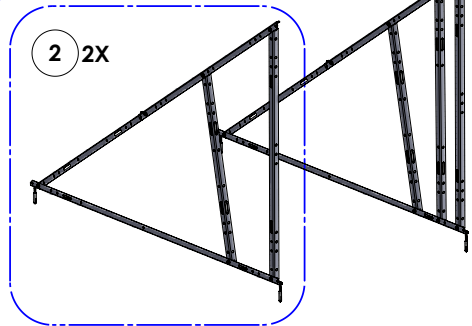


2 2X

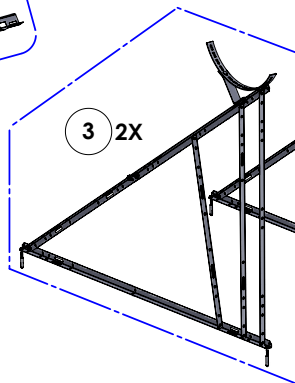

3 2X



5 1X

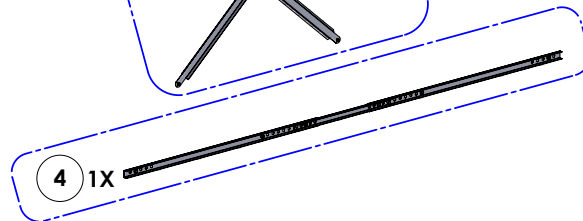

4 1X

1 2X

L=1450 mm


L=1450 mm


8

Washer M8
4 items

Hexagon nut M8
4 items

Flat head countersunk socket cap bolt
M8x16
4 items

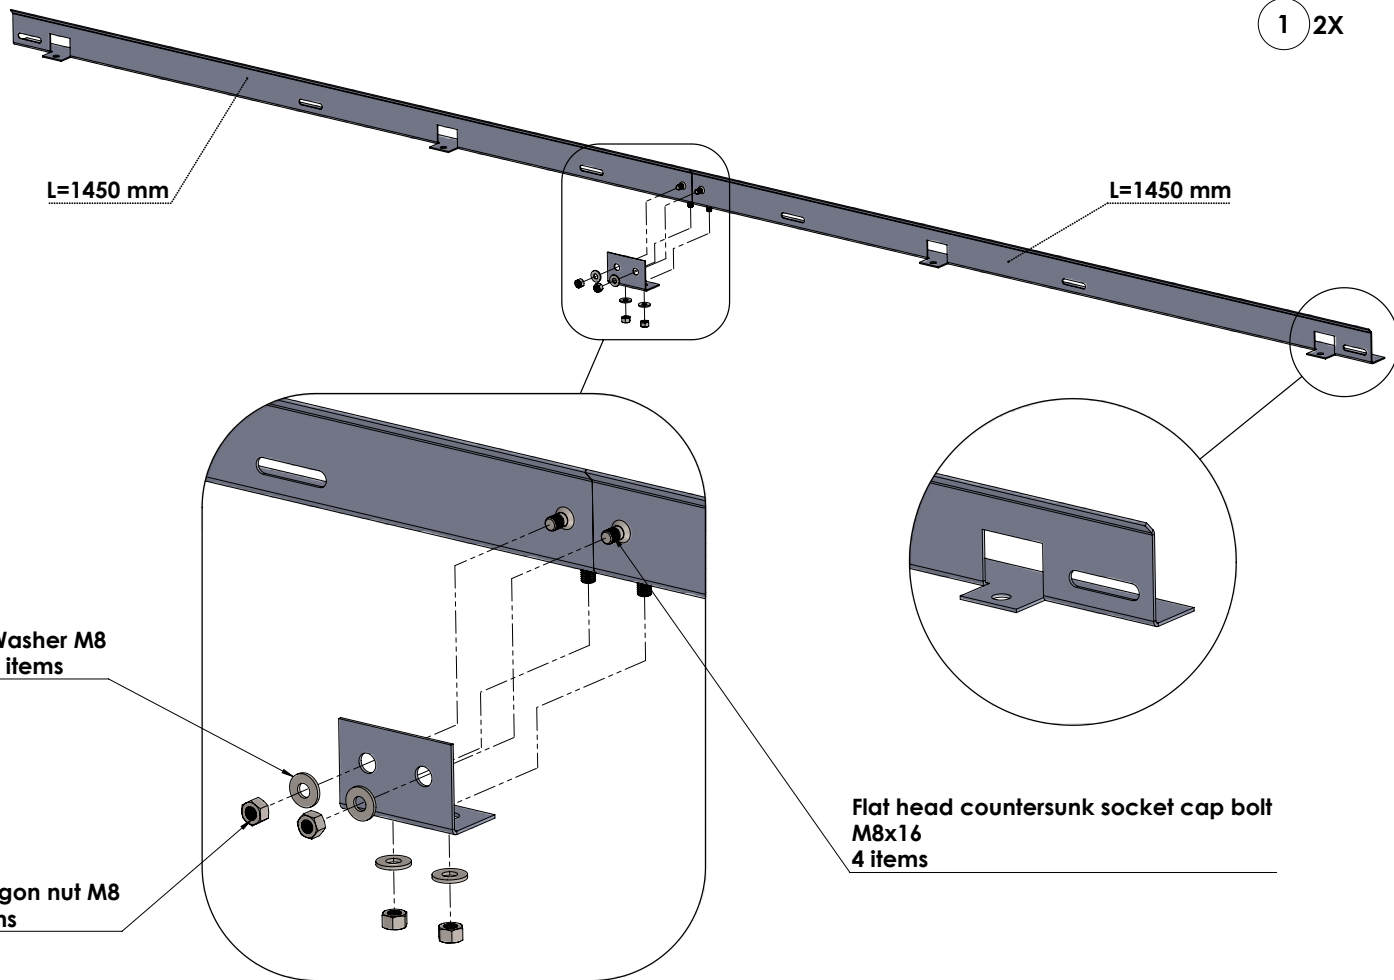

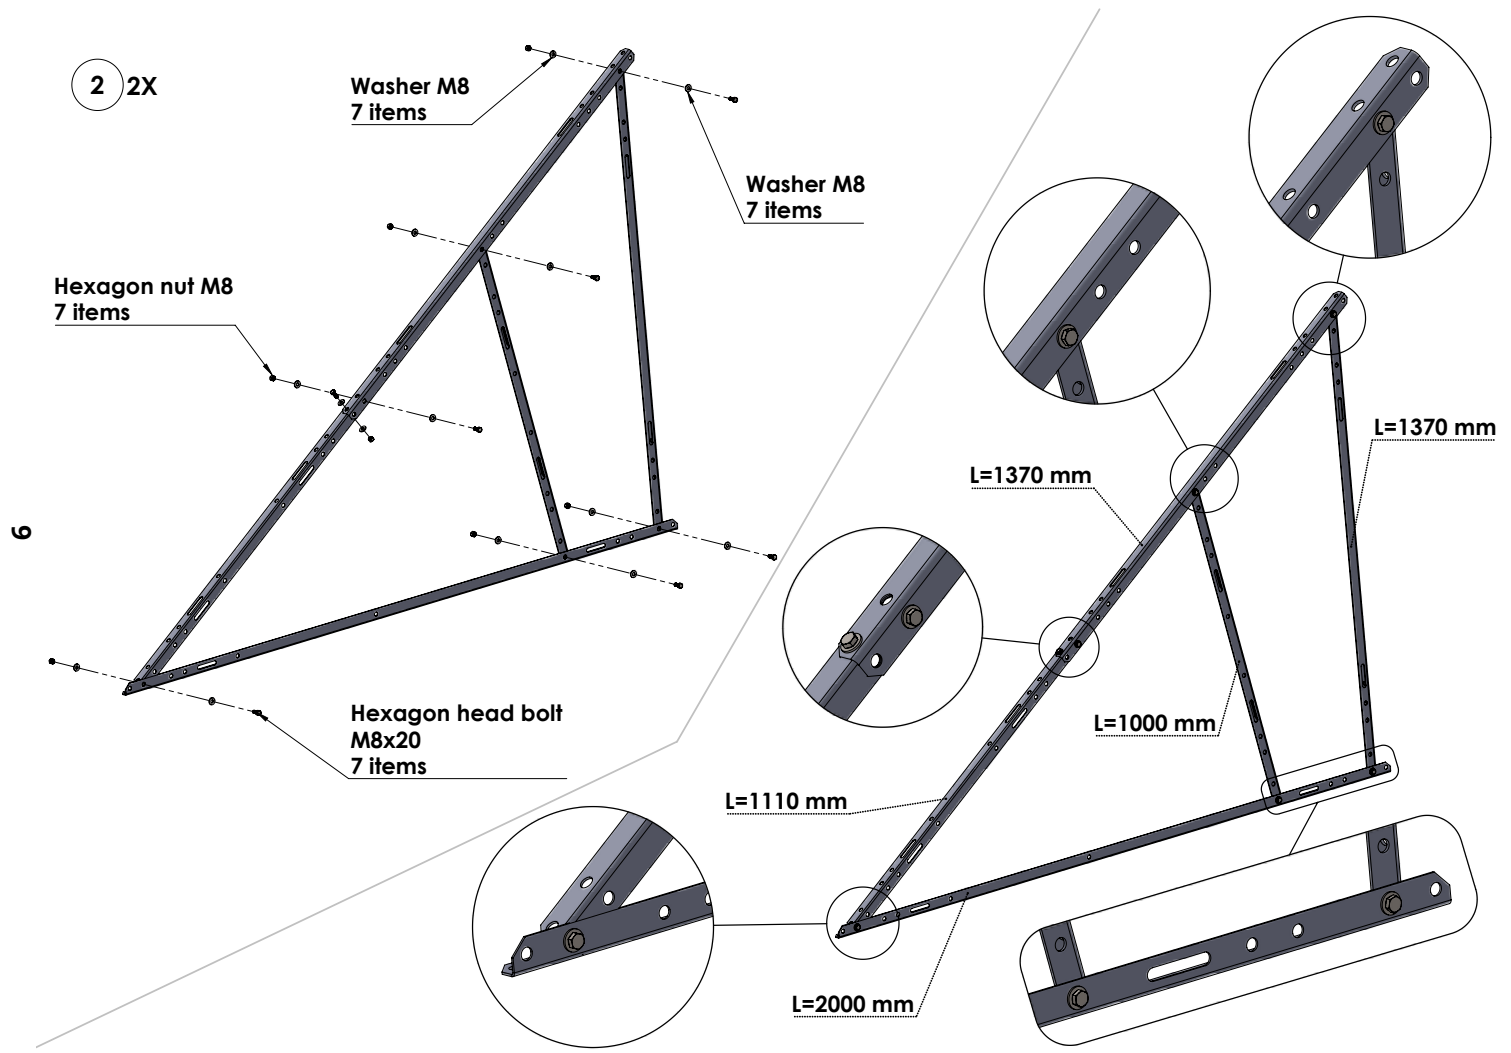

2 2X

Washer M8
7 items

Washer M8
7 items

Hexagon nut M8
7 items

Hexagon head bolt
M8x20
7 items

L=1370 mm

L=1370 mm

L=1000 mm

L=1110 mm

L=2000 mm

6

3 2X

Washer M8
9 items

Carriage bolt
M10x20mm
2 items

Hexagon head bolt
M8x20
1 item

10

Hexagon nut M8
9 items

Hexagon head bolt
M8x20
9 items


Washer M8
9 items

Washer M10
2 items

Hexagon nut
M10
2 items


Washer M8
1 item

Hexagon nut M10
1 item

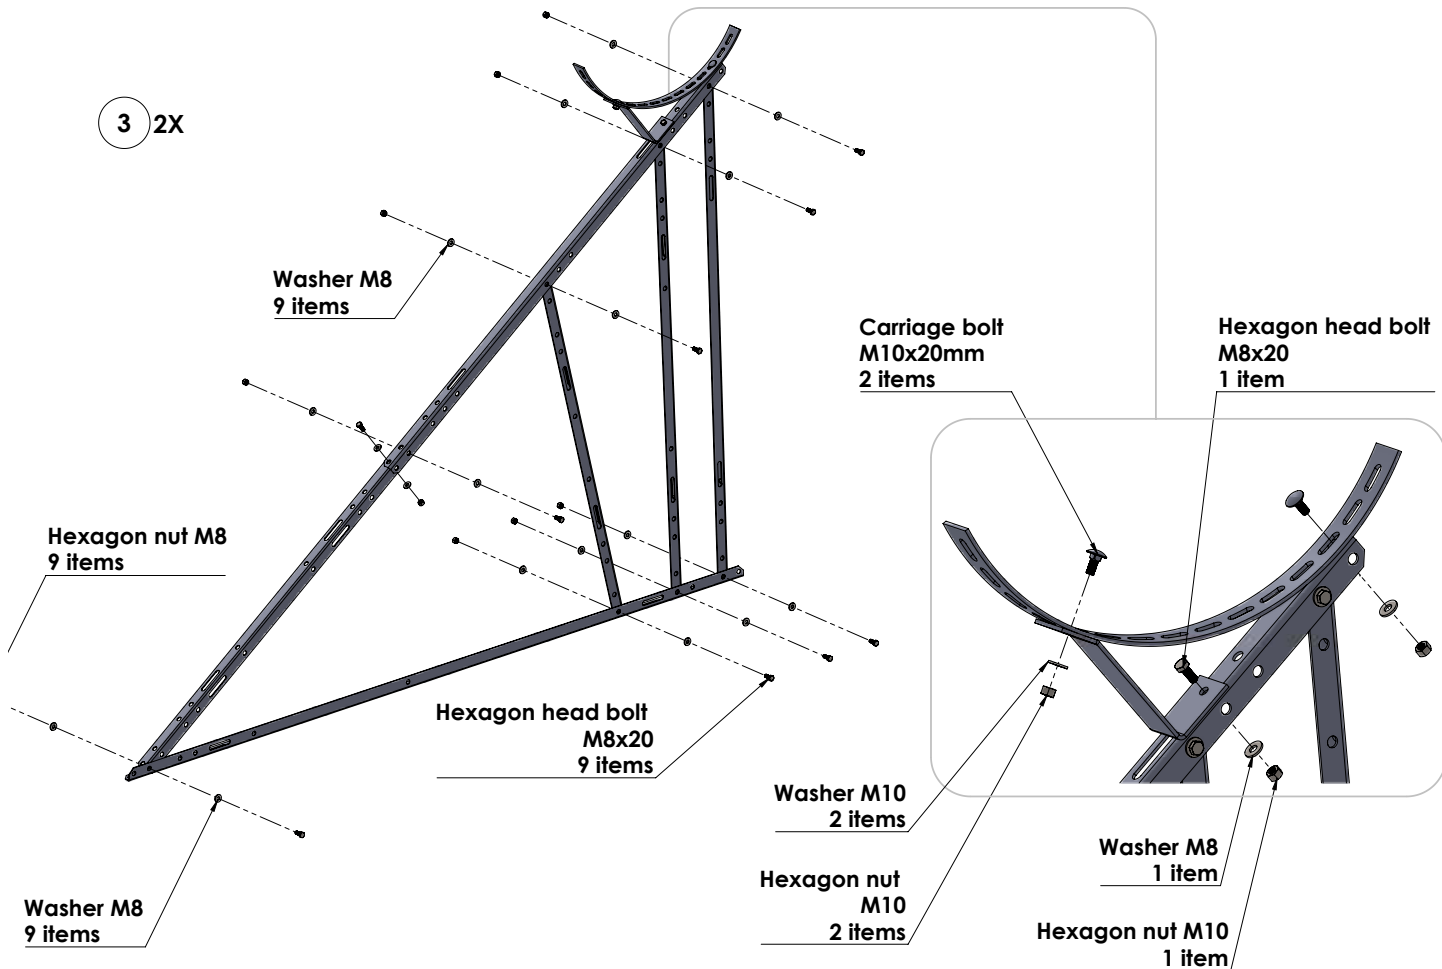

3 2X

11

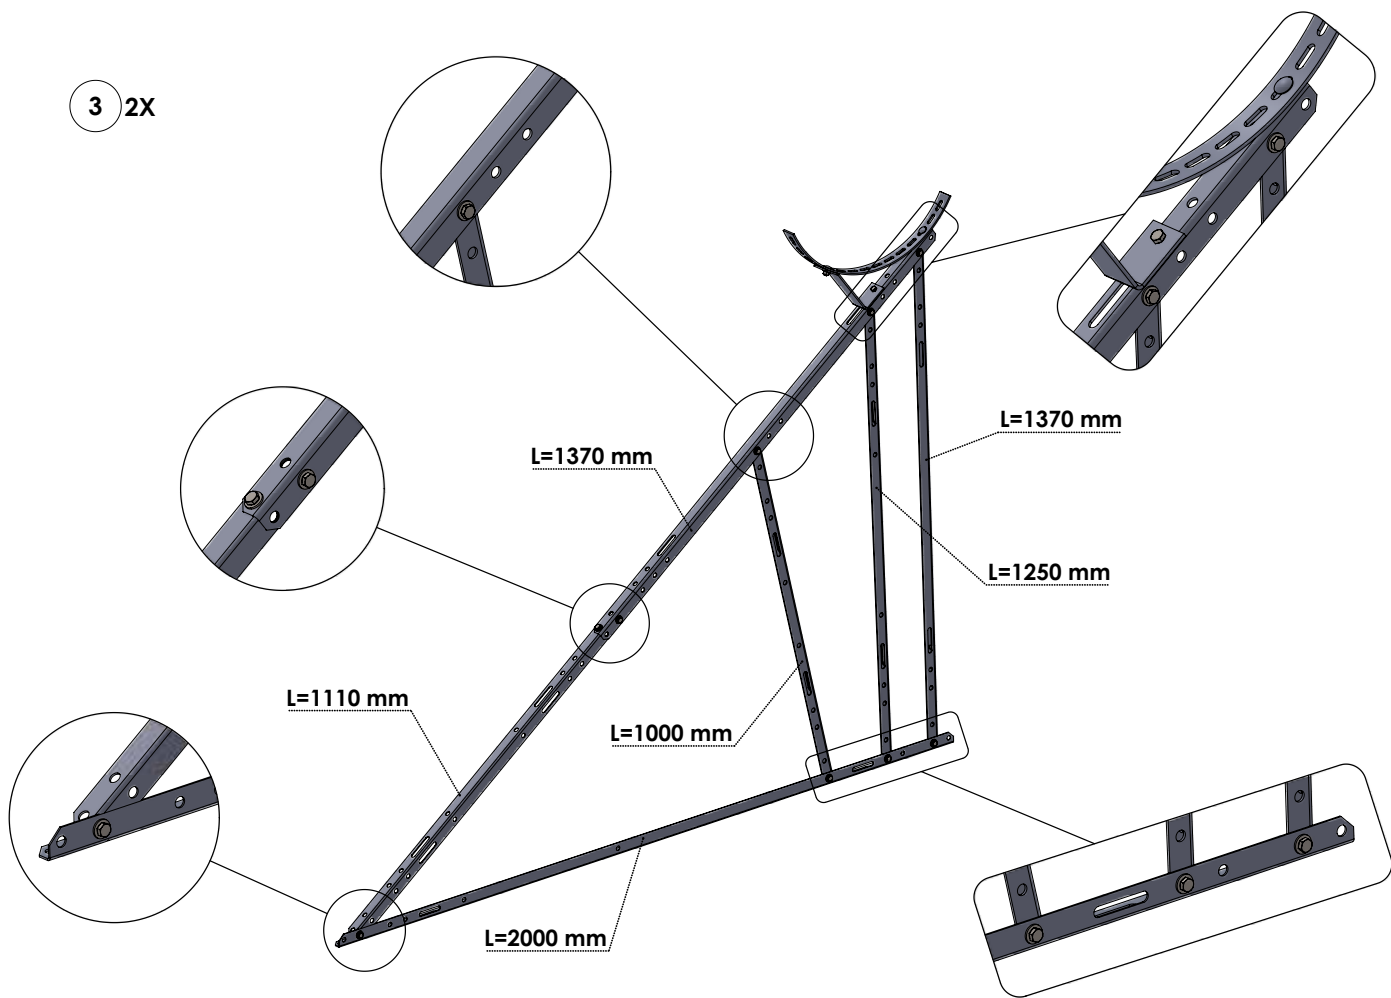

4 1X

P profile
L=1256 mm


P profile
L=625 mm

P profile
L=1256 mm

Washer M8
4 items

Hexagon nut M8
2 items

Hexagon head bolt
M8x20
2 items

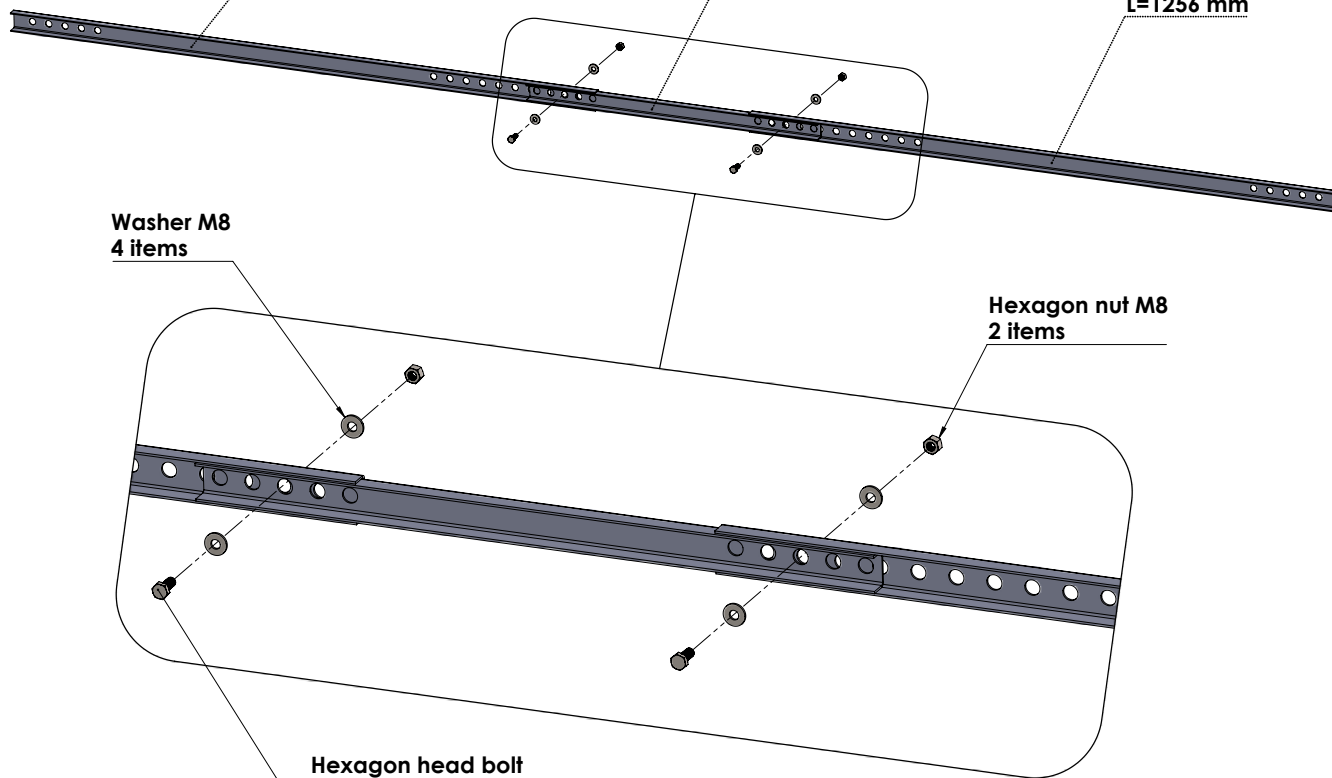


5 1X

13

Hexagon head bolt
M8x20
1 item


Hexagon nut M8
1 item

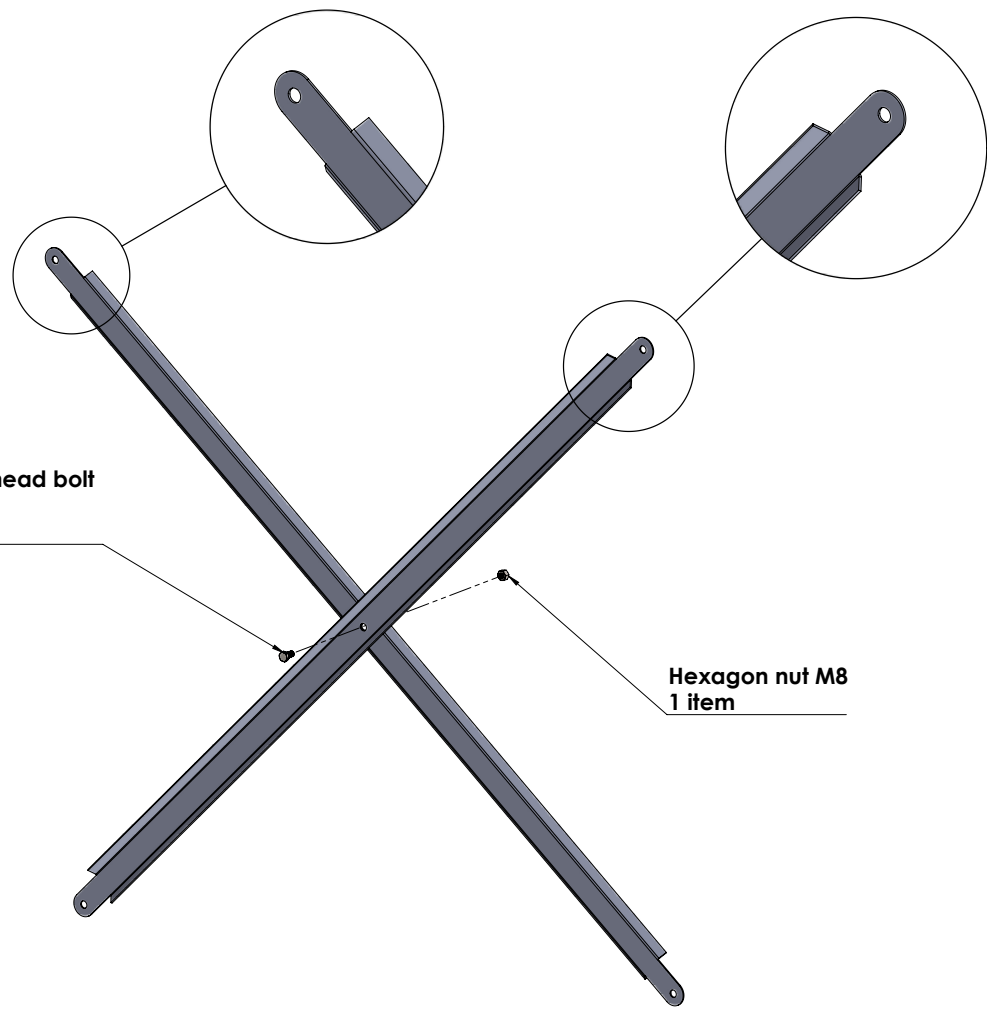

Assembly step 1

**Hexagon nut M8
4 items**

**Hexagon head bolt
M8x20
4 items**

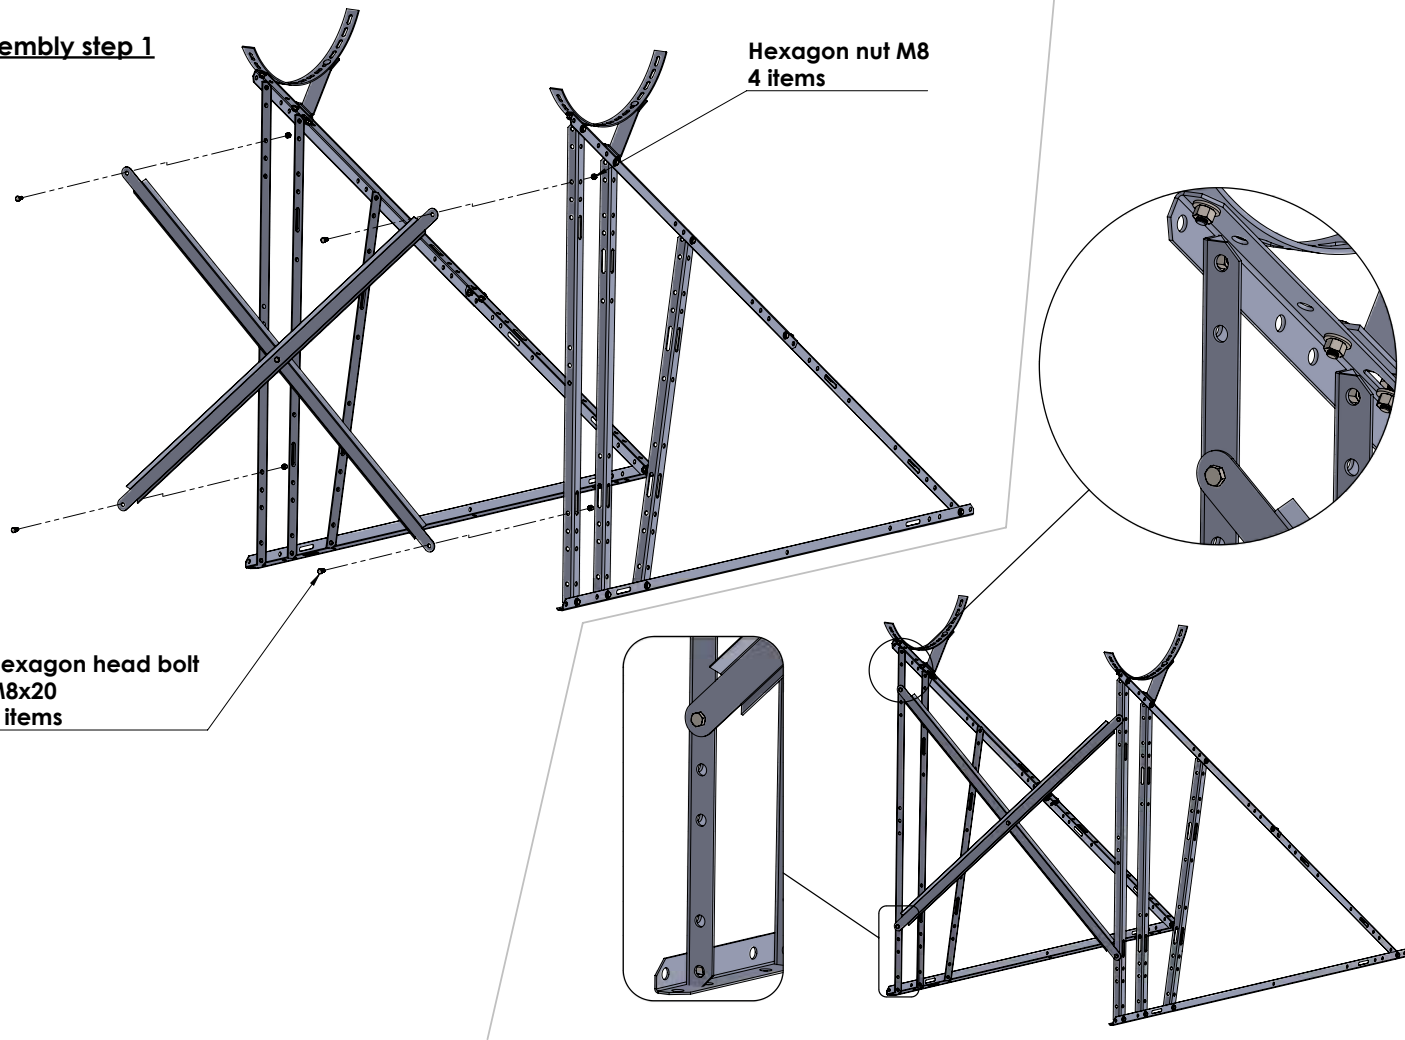



Assembly step 2

15

**Hexagon head bolt
M8x20
2 items**

**Washer M8
4 items**

**Hexagon nut M8
2 items**

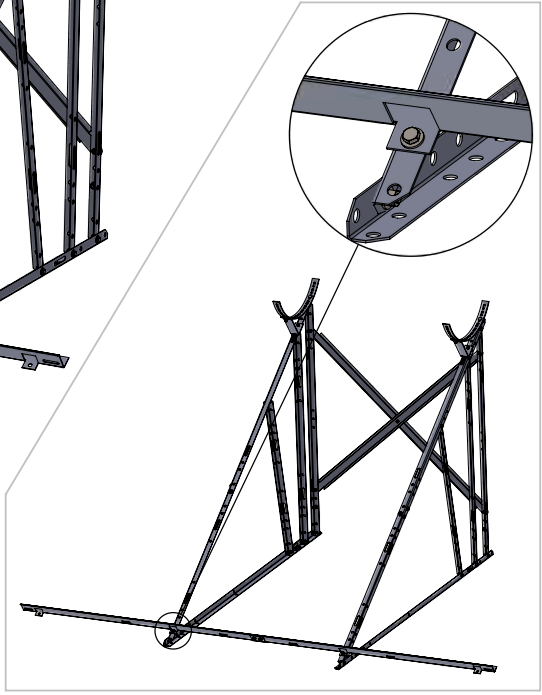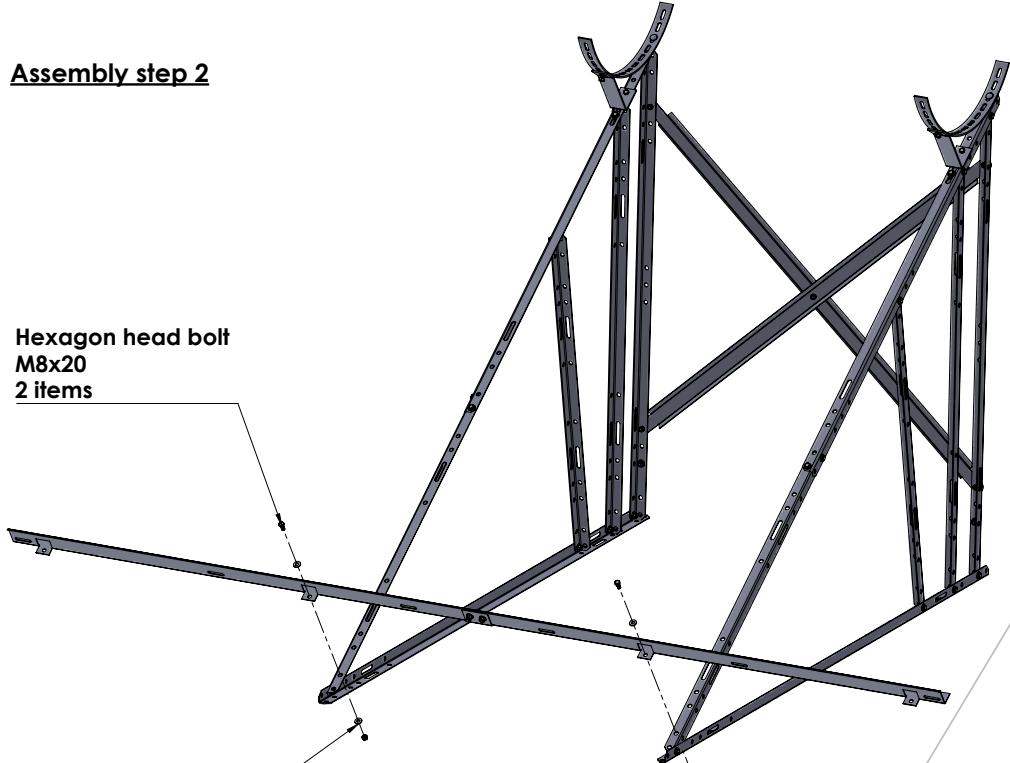


Hexagon head bolt
M8x20
2 items

Washer M8
2 items

Washer M8
2 items

Assembly step 3

Hexagon nut M8
2 items

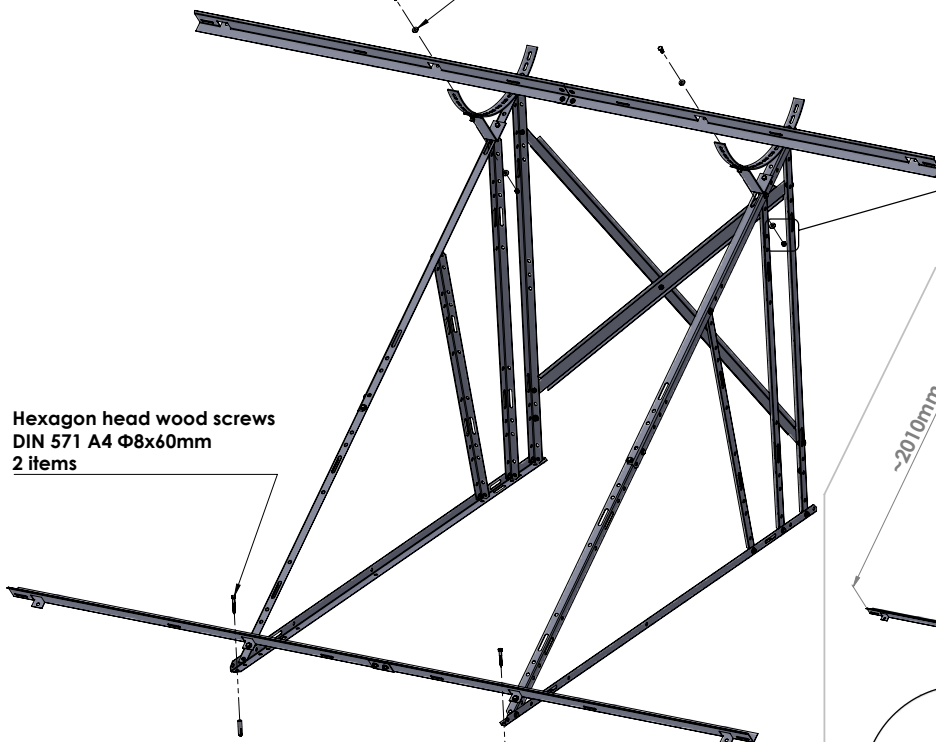

Hexagon head wood screws
DIN 571 A4 $\Phi 8 \times 60$ mm
2 items

Safix Plastic 8mm plug
2 items




Assembly step 4

17

Hexagon head bolt
M8x16
4 items

Washer M8
4 items

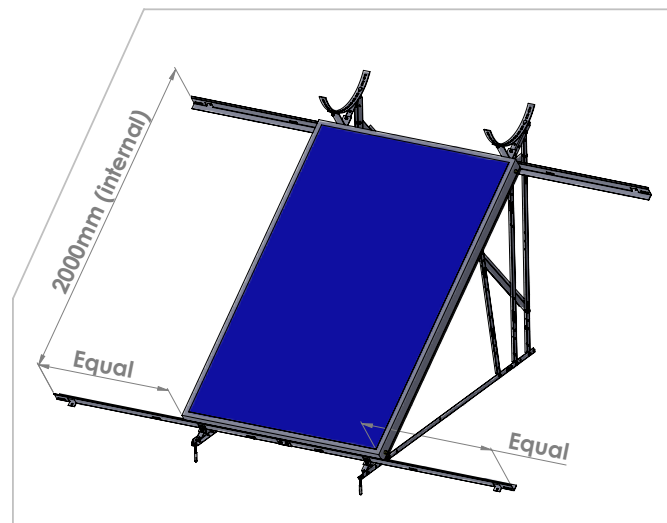

Assembly step 5


18

Hexagon head bolt
M8x20
4 items

Washer M8
4 items

Washer M8
4 items

Hexagon nut M8
4 items

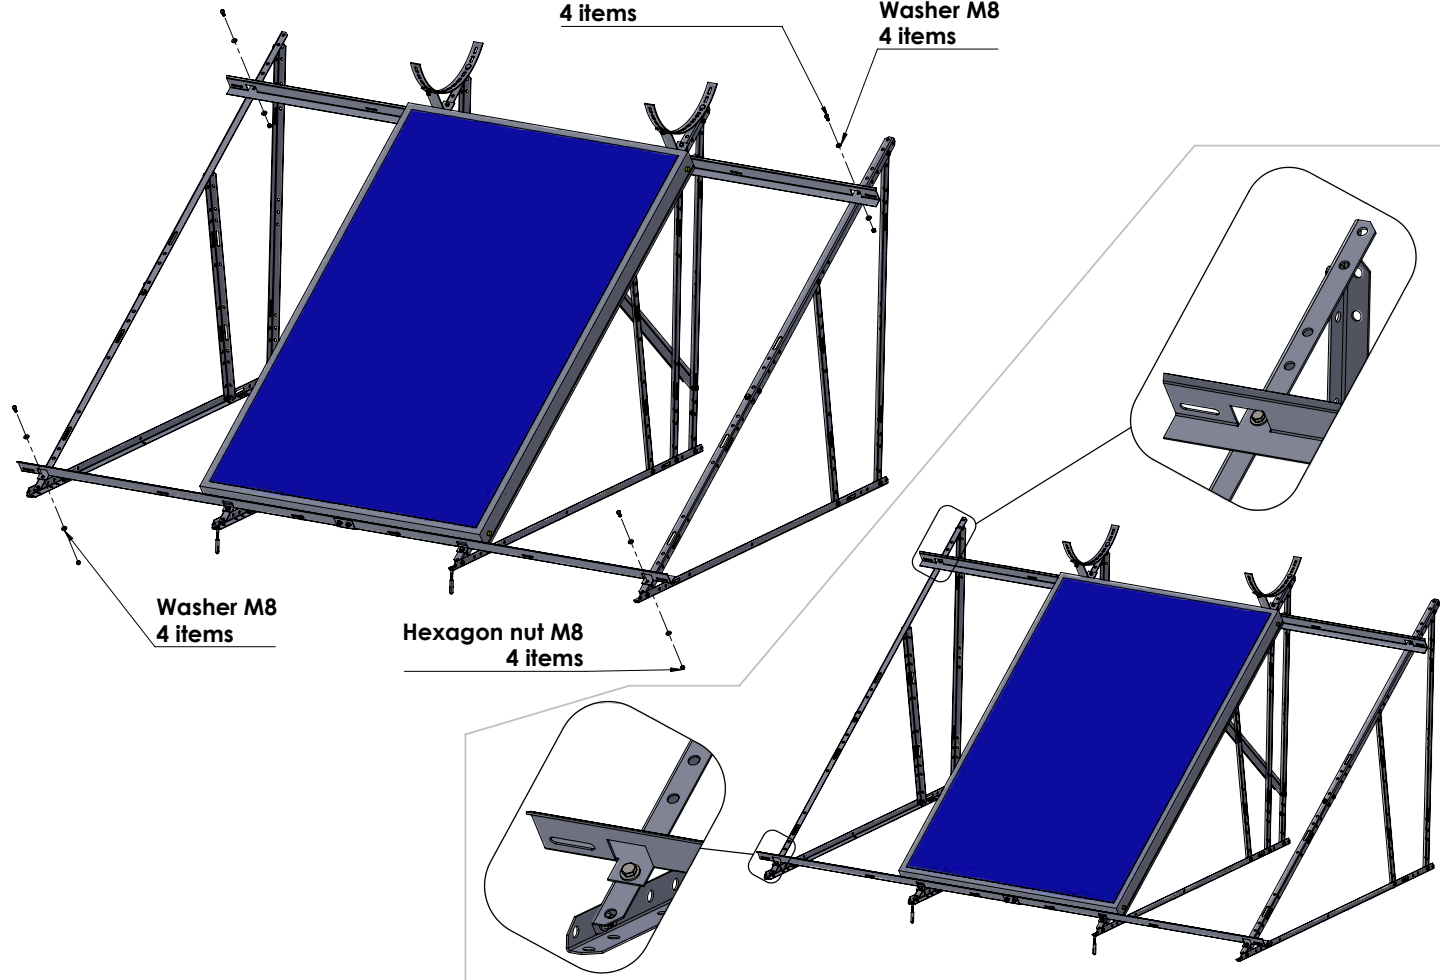

Assembly step 6


19

Washer M8
4 items

Washer M8
4 items


Hexagon head bolt
M8x20
4 items

Hexagon nut M8
4 items

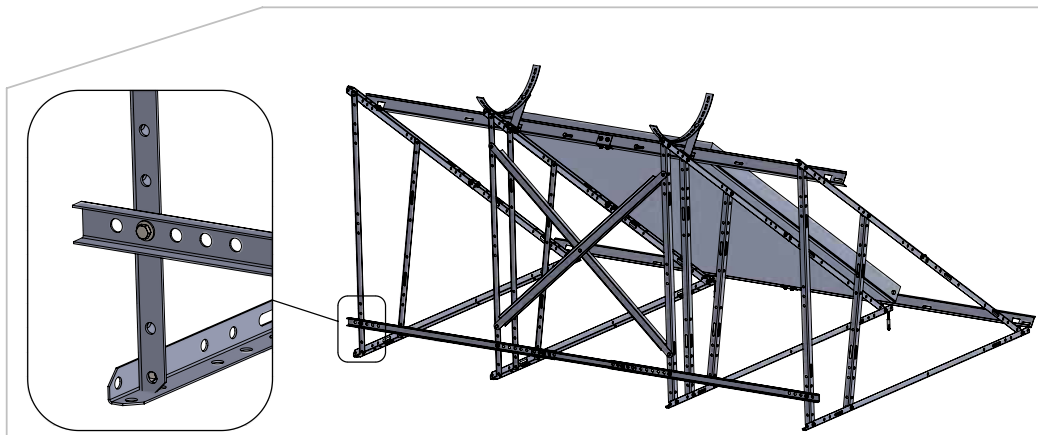


Assembly step 7


20

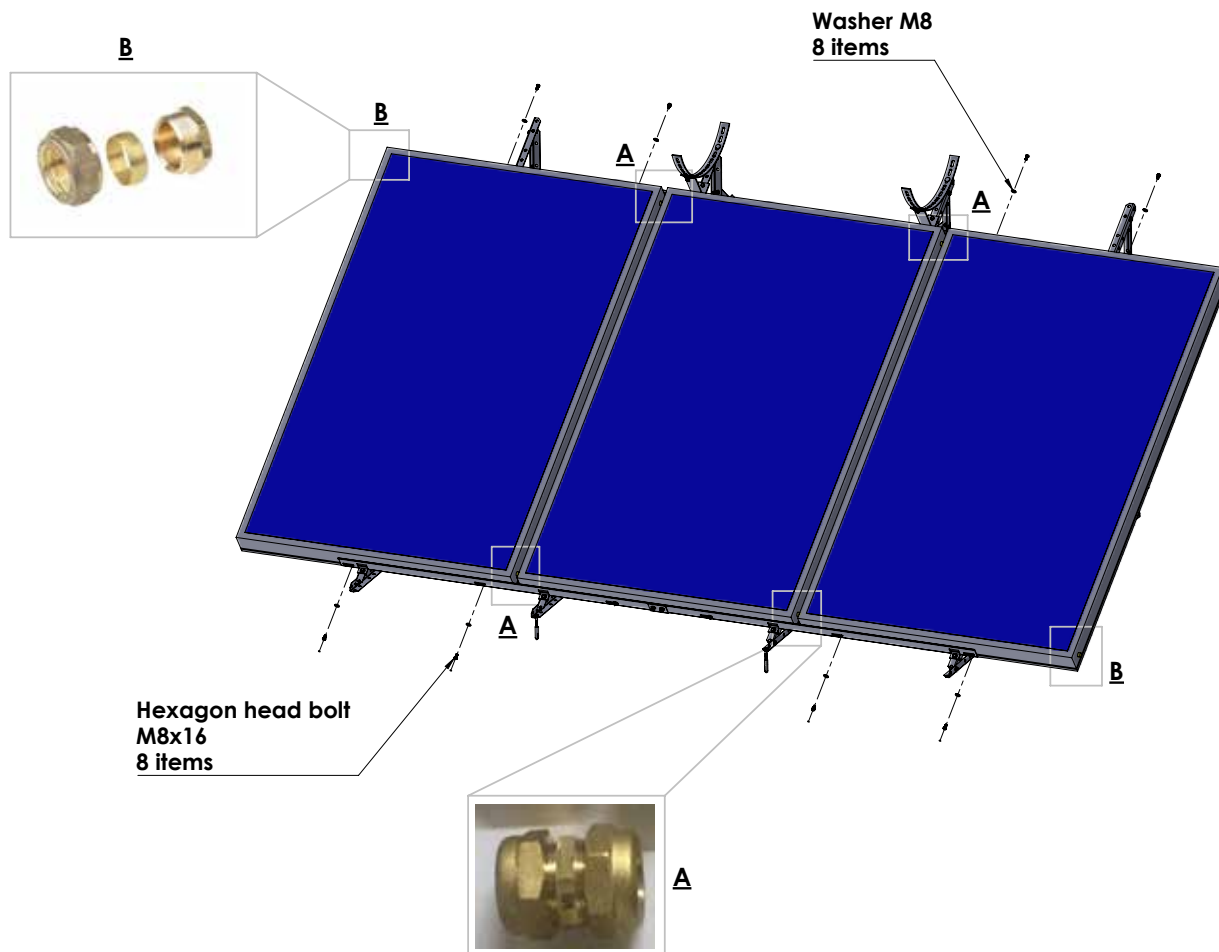

Assembly step 8

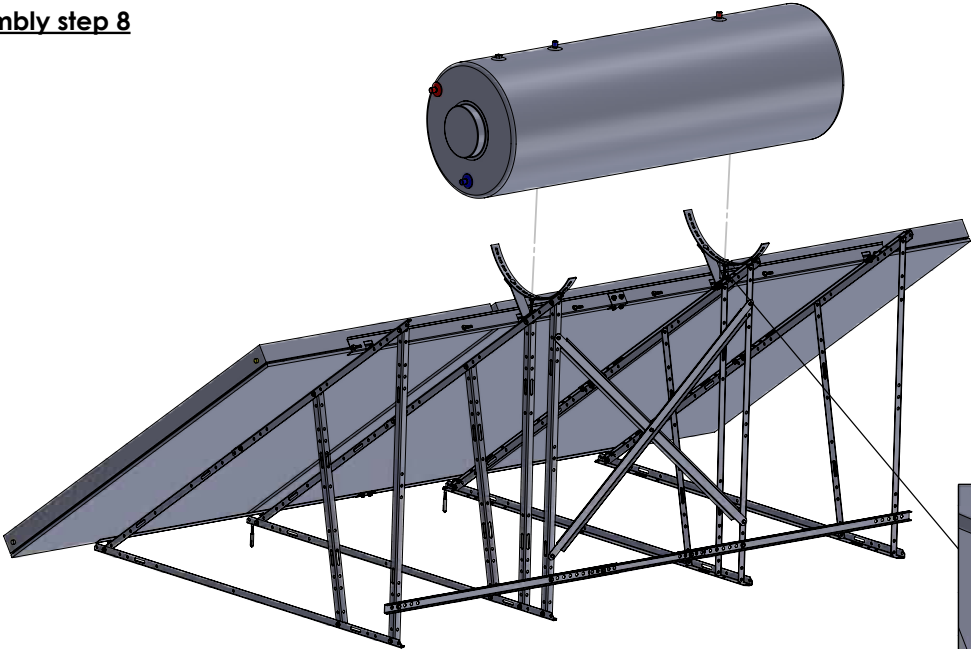


**Washer M8
2 items**




**Hexagon head bolt
M8x20
2 items**

Assembly step 9

Hexagon head wood screws
DIN 571 A4 $\Phi 8 \times 60 \text{ mm}$
6 items

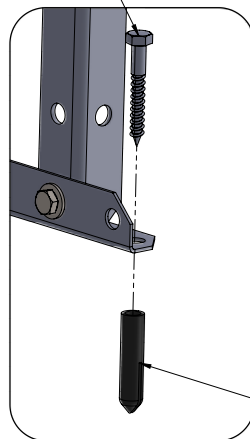

Safix Plastic 8mm plug
6 items

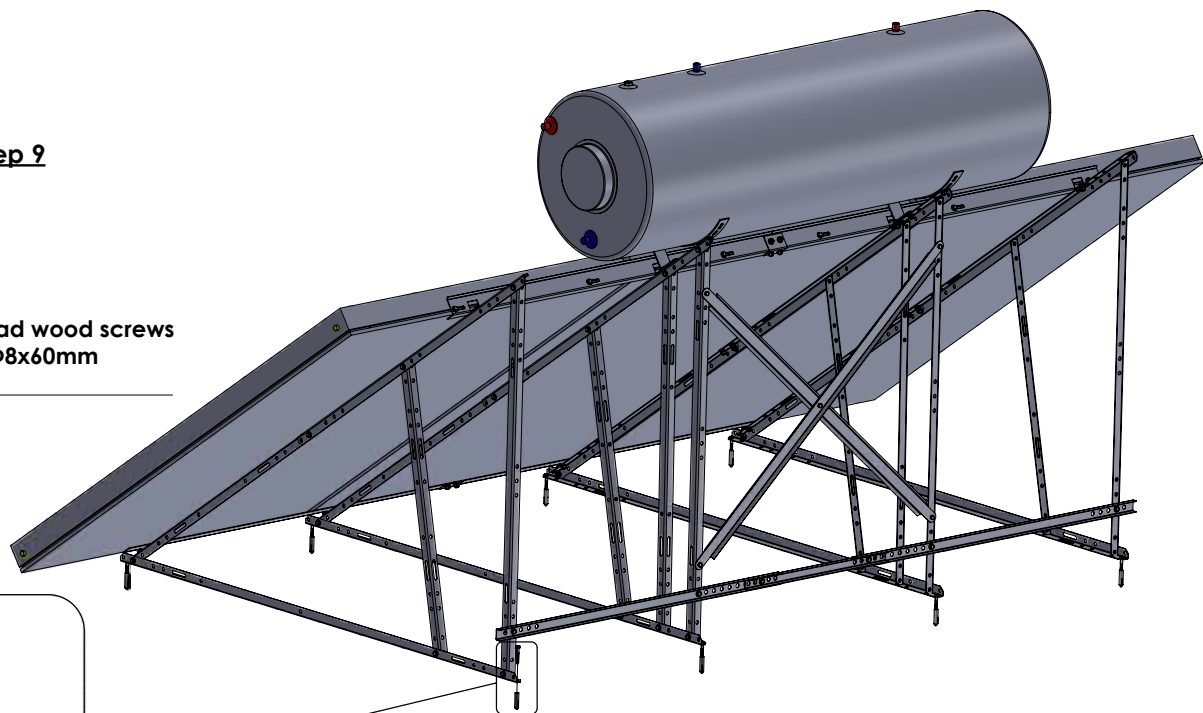

Assembly step 10

Hot water outlet
G3/4

Optional equipment (not included)




If continuous high temperatures are expected, due either to oversizing of collectors for the actual location or location's climatic data, on the primary (solar) circuit, the use of thermostatic relief valve is mandatory (not included in the SWH set). Guarantee is not valid if not installed.



M




23

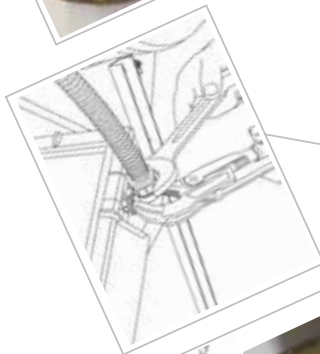

J

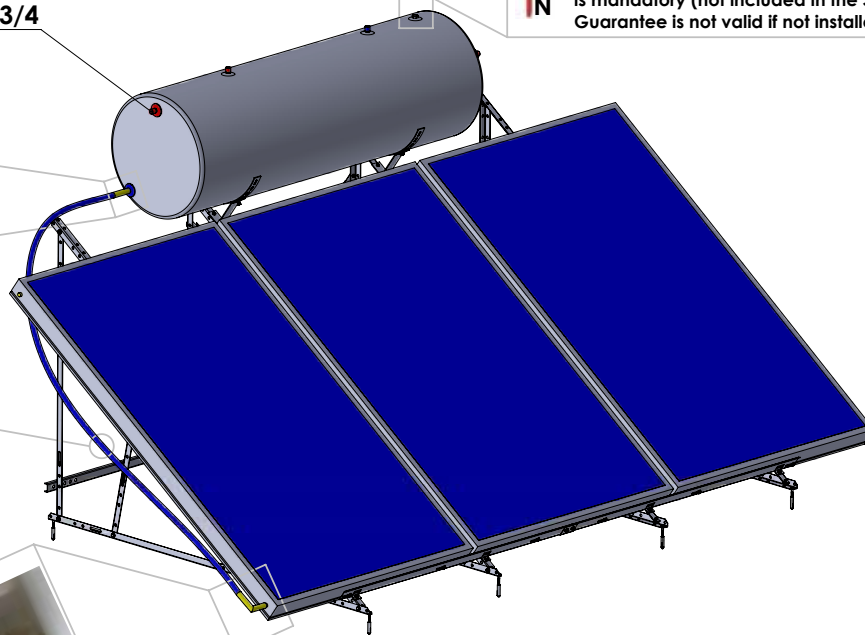


24

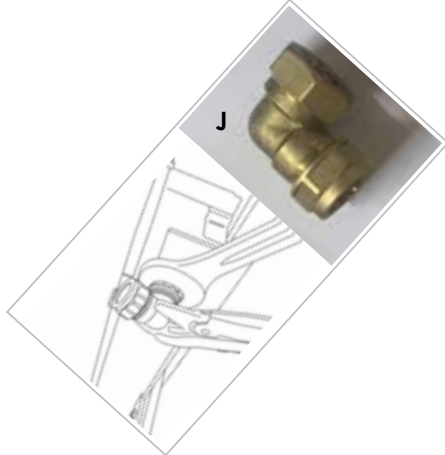



Mix the content of the bottle of antifreeze thermal liquid provided with enough water in a container (minimum 10 litres of water) according to the provided table.


Fill the boiler with the mixture using any of the 3/4" inlets on the upper side of tank and top up with water until overflows.


Install the pressure relief valve and brass cap.

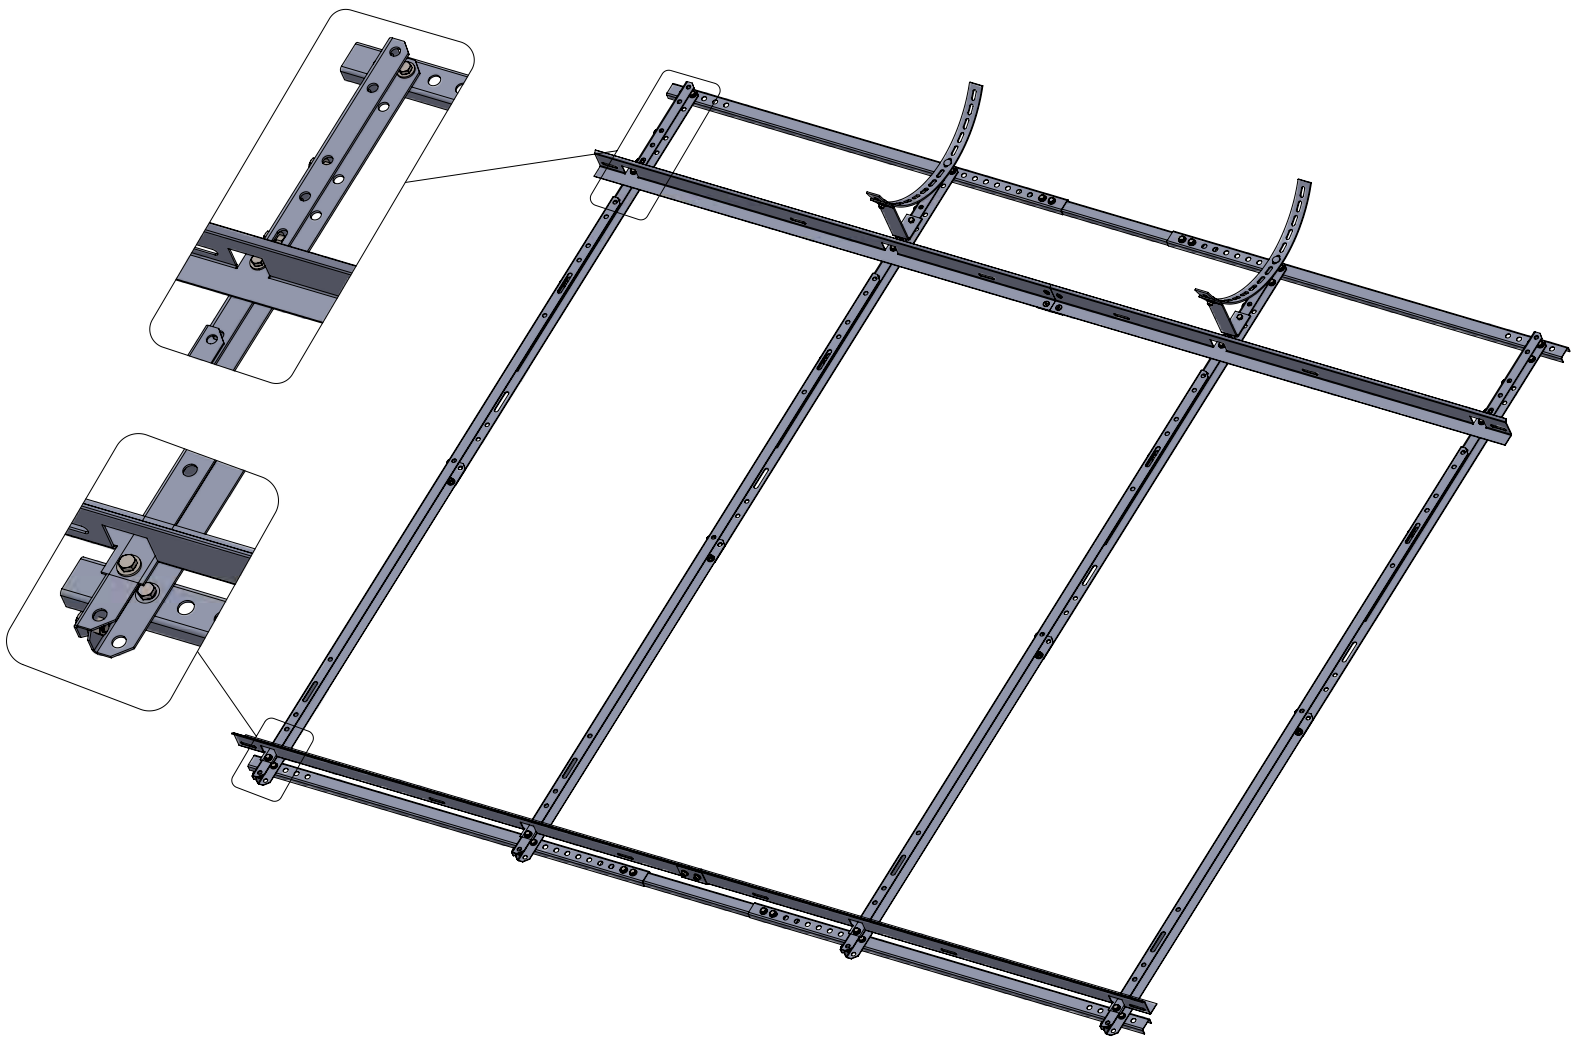


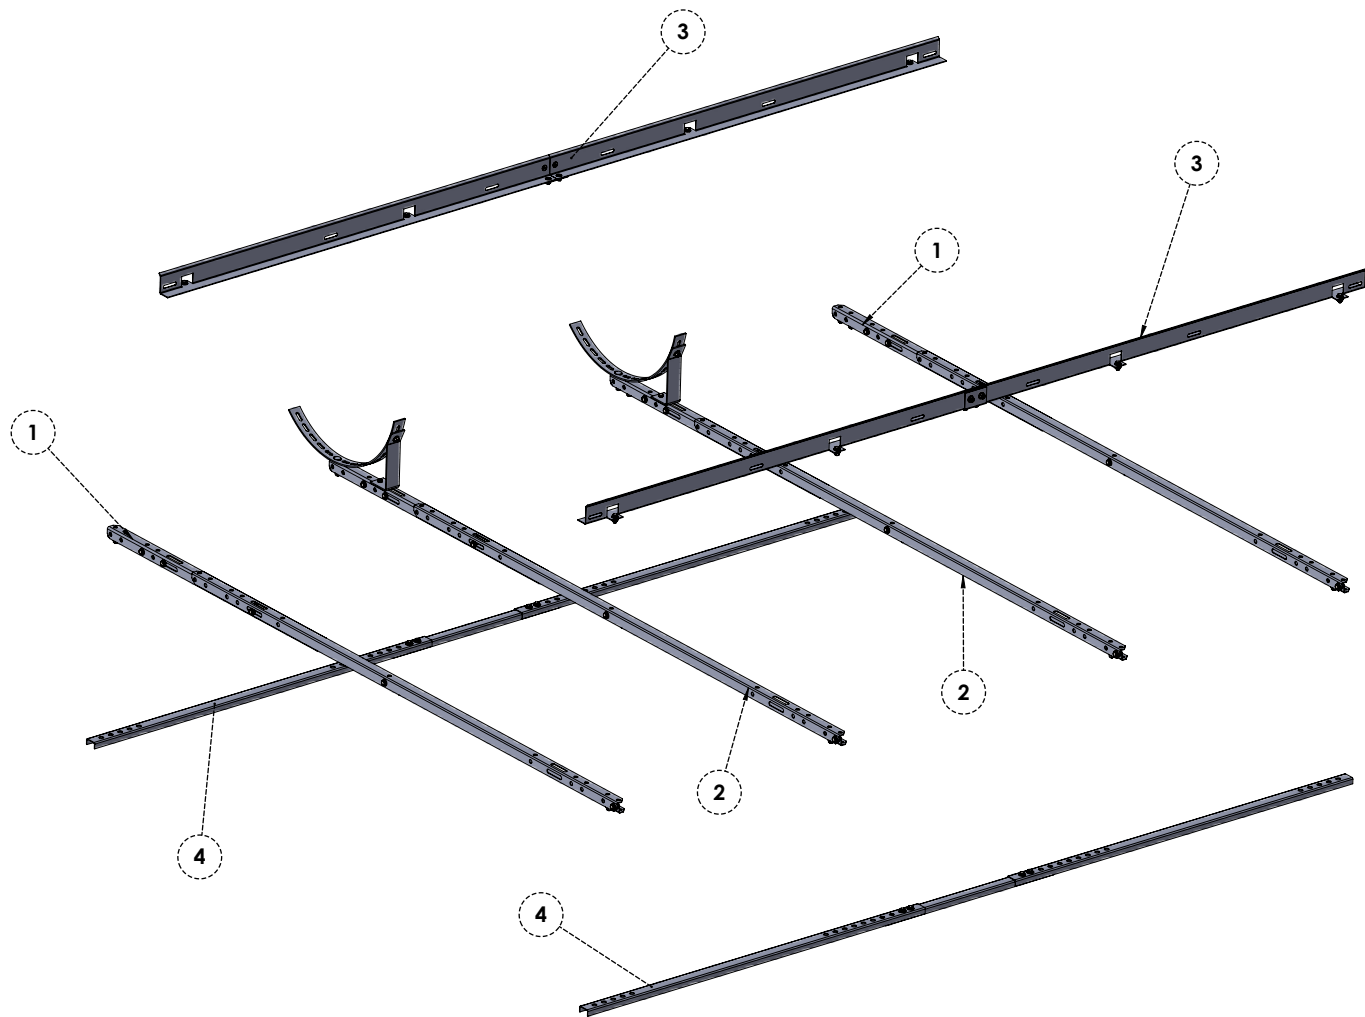

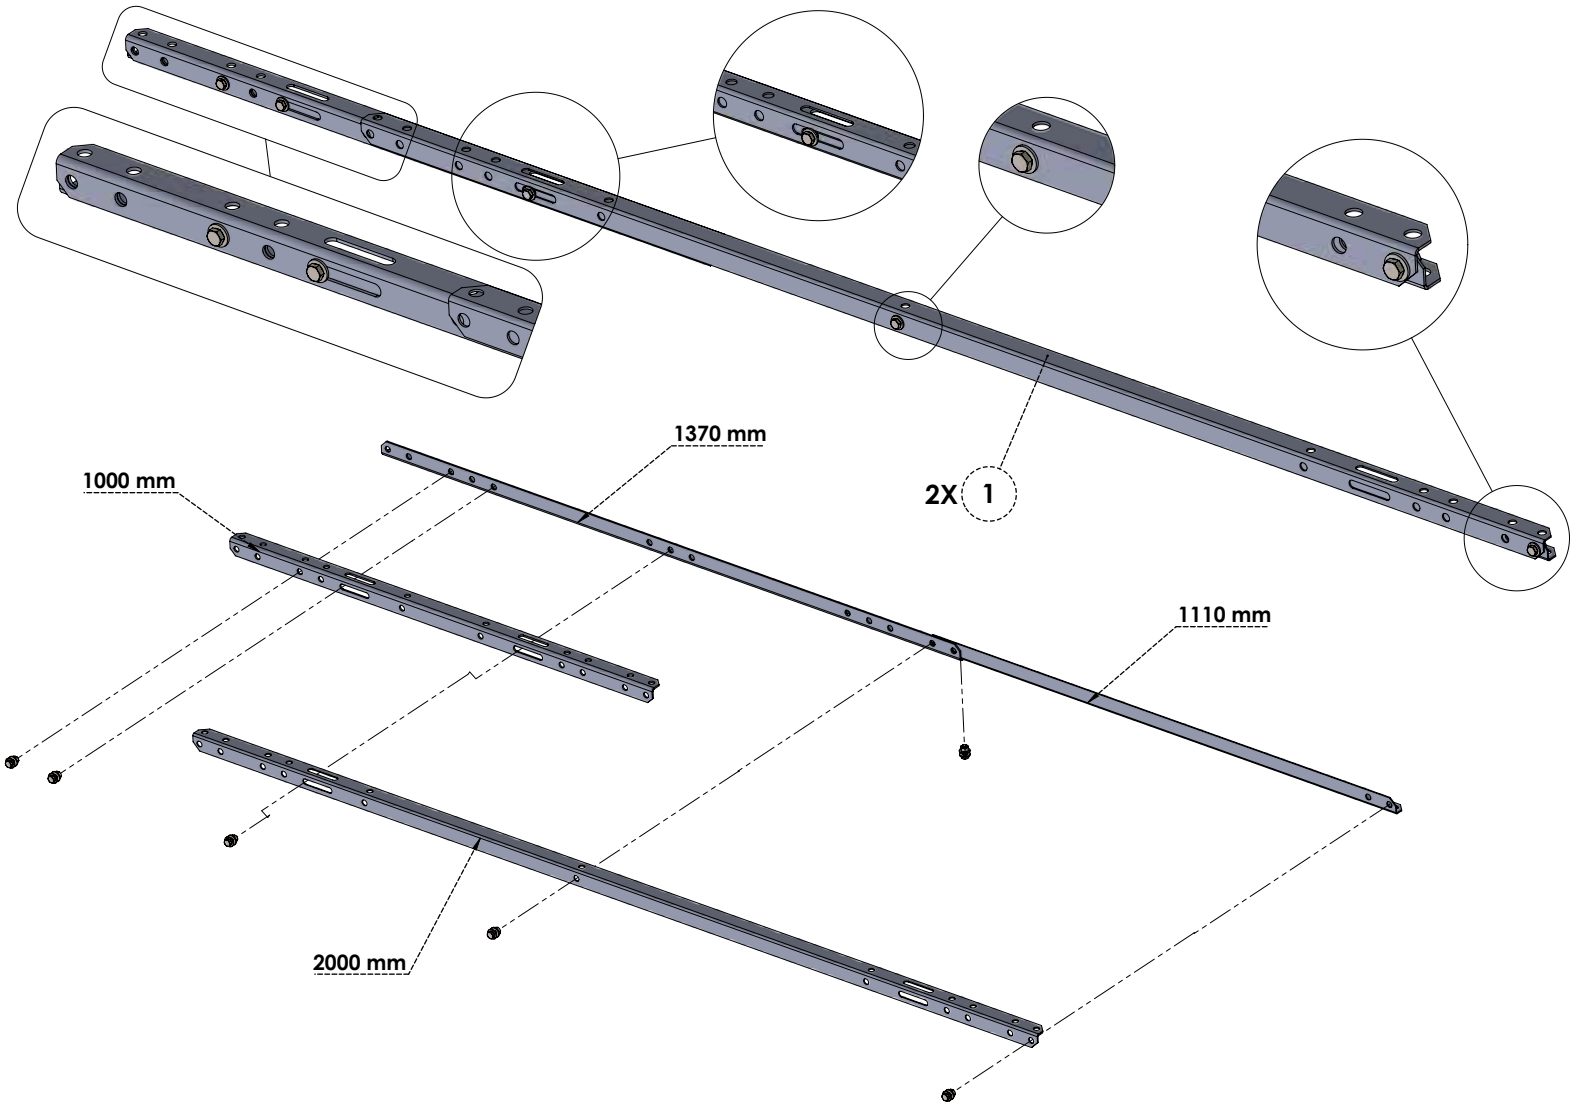


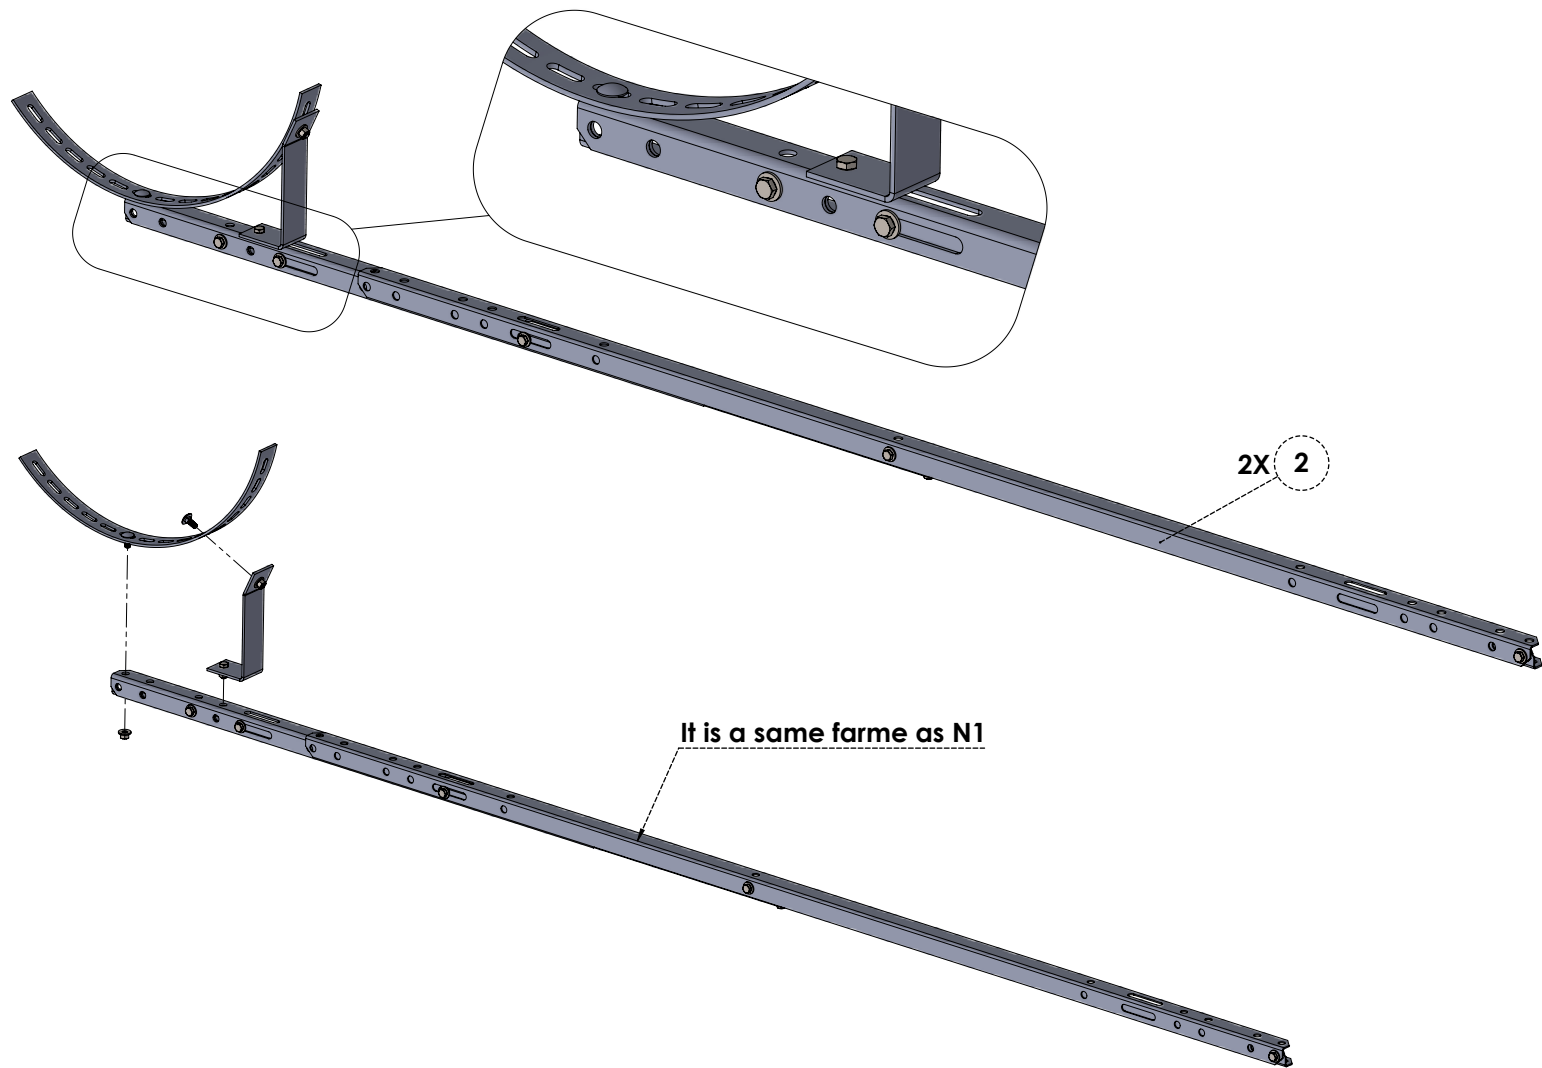


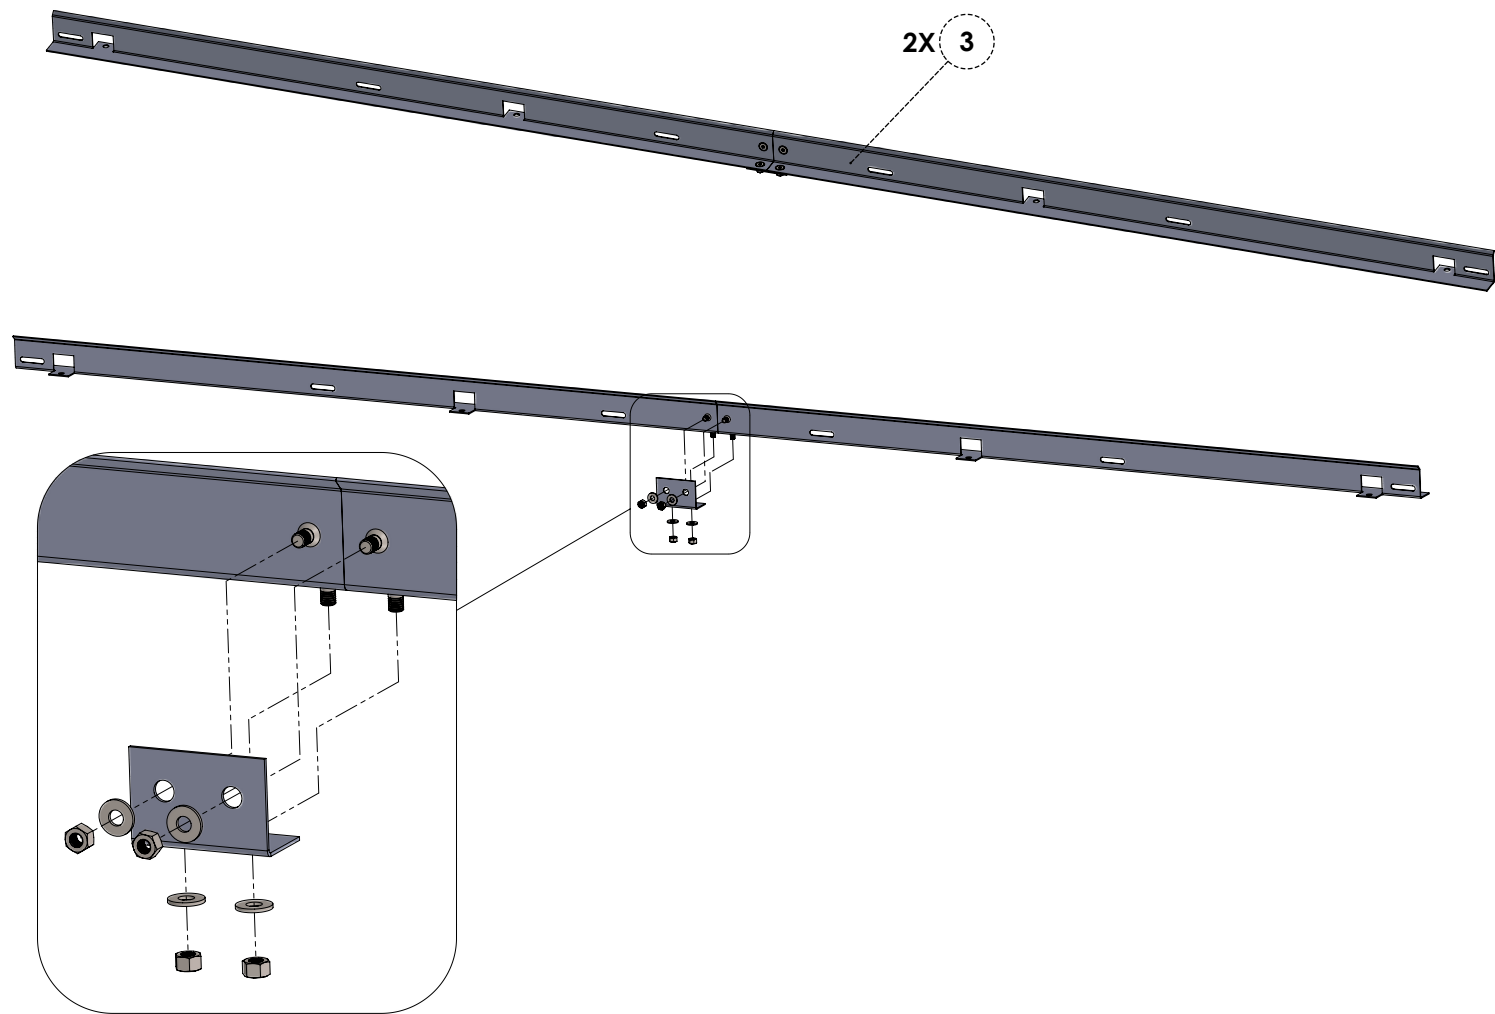




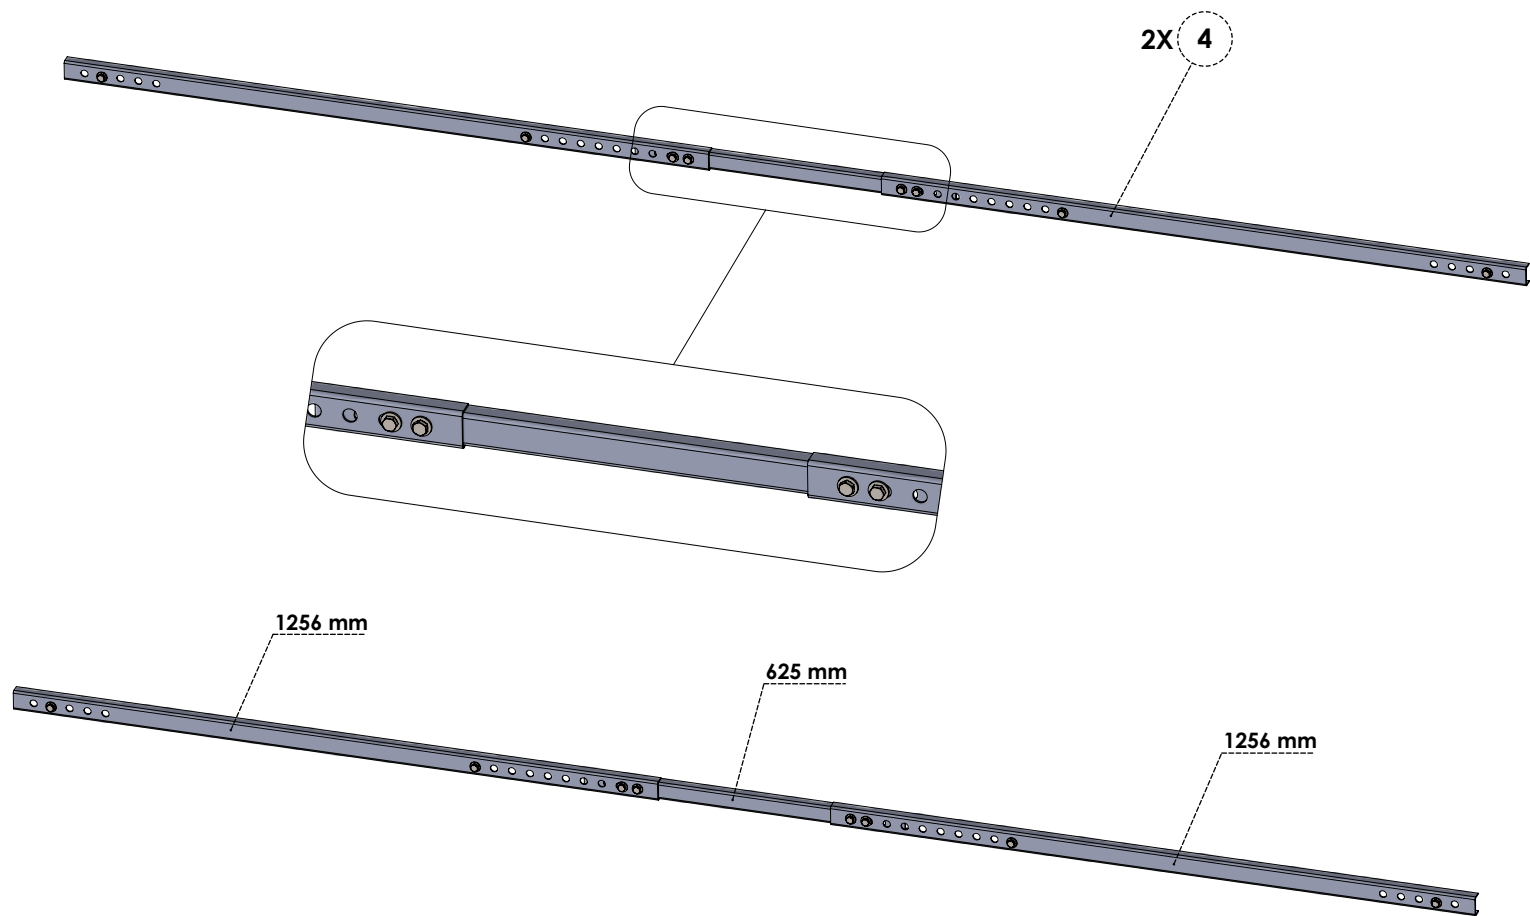


Assembly step 6
Case N1

31

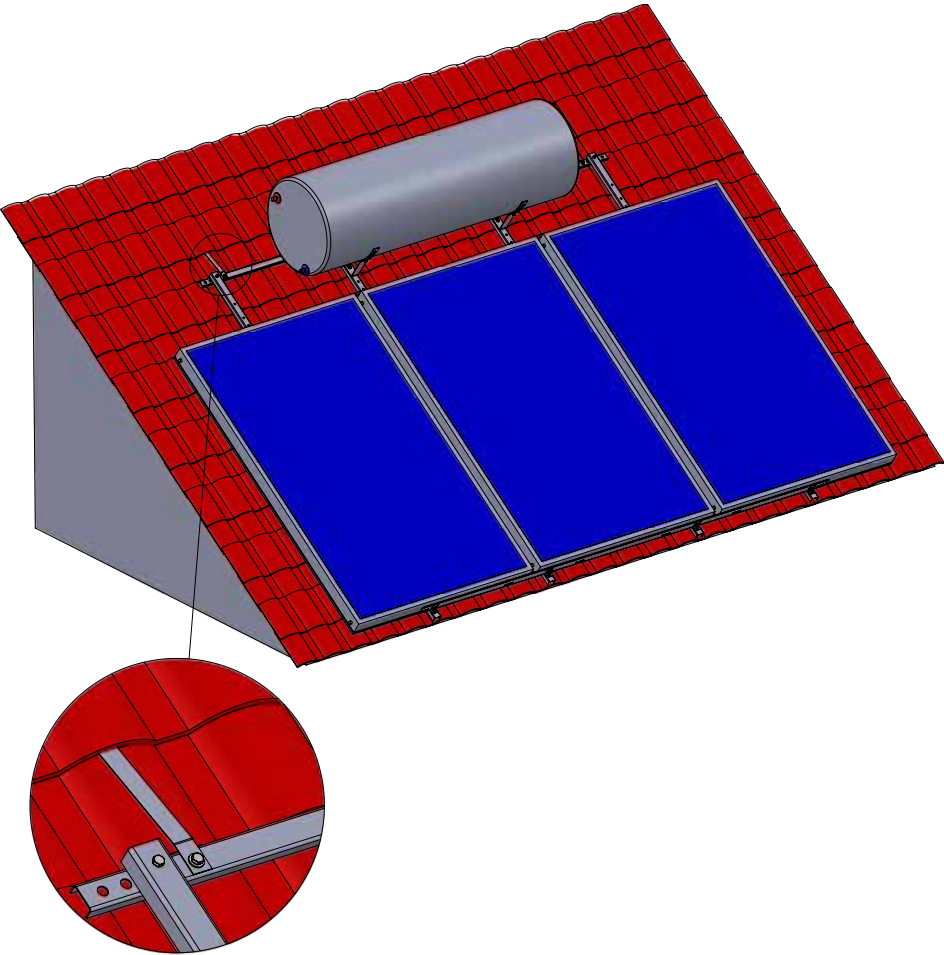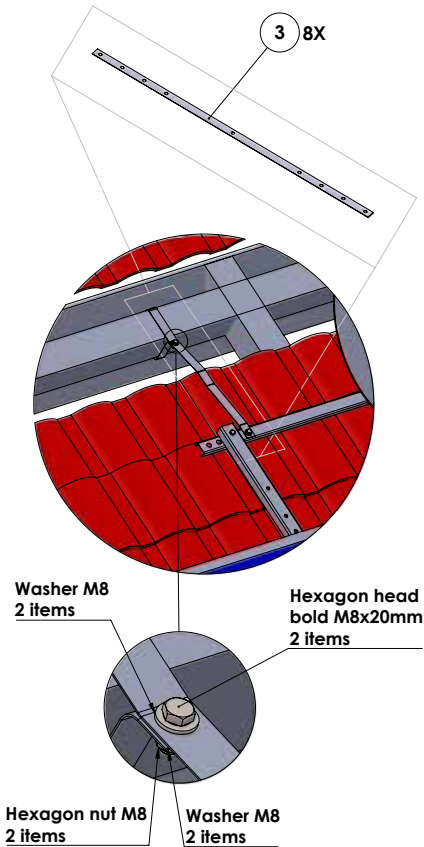

Assembly step 6
Case N2

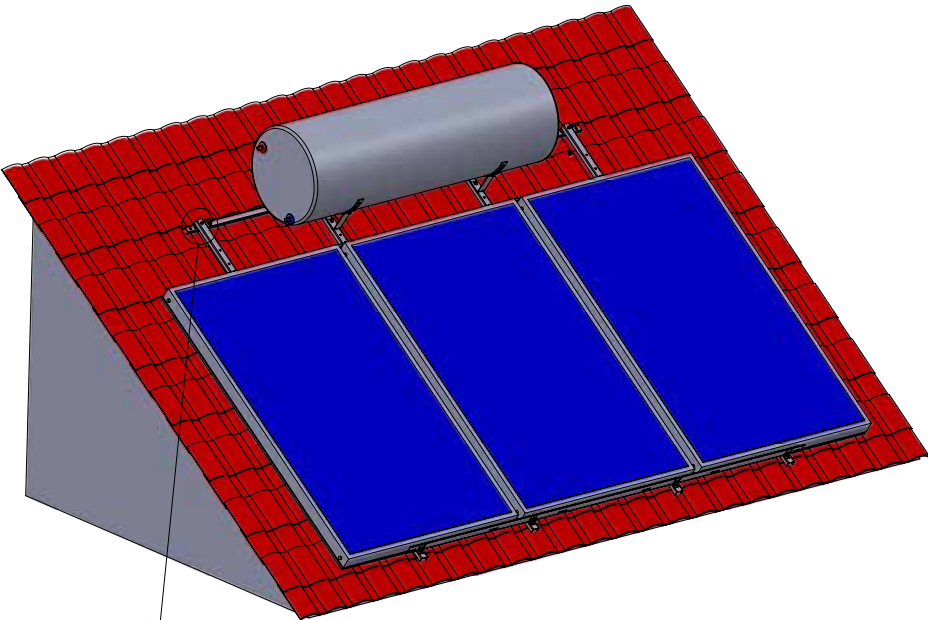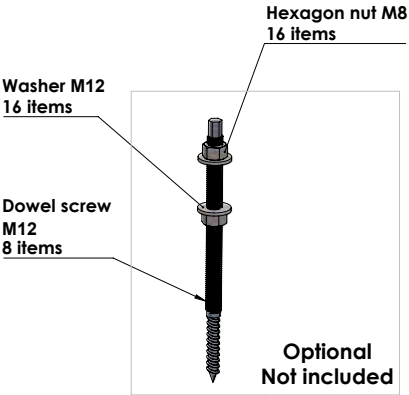

4. table of proportion and antifreeze protection

% vol.	Frost protection [°C]
25	-10 °C
30	-14 °C
35	-17 °C
40	-21 °C
45	-26 °C
50	-32 °C
55	-40 °C

5. THERMOSIPHONIC SYSTEM Instructions and maintenance.

General instructions and maintenance

- The system will reach optimum performance two days after installation.
- We recommend to inspect the glass cover of the collectors periodically ,clean them in case there is dust or snow or anything else that might interfere the solar rays, see any cracks on the surface and replace it as soon as possible if you see any possible damage.
- Check the antifreeze liquid of the circuit at least once per year and add the necessary quantity to fill the system.
- Check at least once per year the all valves ,check if any bolts and nuts are well screwed and generally check the stability of the support frame.
- If you decide to leave the house for a long period ,cover the collectors ,it is essential for the well being of the circuit.
- Check periodically for any leaks ,any bended tubes ,air bubbles trapped in the system ,check if all tube connections are in the proper exits and inlets.

Electrical resistance

- Check for obvious damage of the electrical element with thermostat.
- Check the wiring connection of the resistance and the thermostat.
- Check if the thermostat is placed in the proper temperature ,temperature should not exceed 75° C. The factory adjustment is 65° C.
- Check if main supply reaches the element.
- Always turn the power off before you start repairing the electrical parts of the system.

Magnesium bar (anode)

- Before checking or replacing the anode turn the power off.
- Empty the water from the tank.
- Unscrew the resistance tap.
- Remove the thermostat from the element.
- Unscrew the flange carefully.
- Unscrew the anode ,check or replace the bar back in position.
- Place back the flange and follow the procedure vice versa.
- Refill the tank.
- Switch the power back on.

Lightning protection

The collectors should always be connected (the metallic parts) through a copper conductor 16mm with the lightning conductor system, if there is any ,if not the collectors should be connected with any conductor system using the same copper conductor from the collectors.

The conductor shouldn't go through the inner space of the house and it should be Installed by a certified electrician.

Collectors are installed on top of a metallic support base and the installer should check if the collector is attached with a secure manner, checking all the bolts and screws if they are well placed.

Always call a certified installer to do the proper maintenance of the system, in case there is an electrical issue please call a certified electrician.

Guarantee terms and Limitations

Guarantee is valid when below mentioned water quality characteristics are fulfilled:

- Saturation Index (Langelier) : LSI >0,1
- Corrosivity Index (C.I.) : 0,5 < C.I. < 3
- Where $C.I. = \frac{c(Cl) + c(NO_3) - 2c(SO_4^{2-})}{c(HCO_3)}$ and $c(HCO_3) \geq 2,0 \text{ mmol/l}$
In such case magnesium anode rod should be replaced annually.
- When C.I. >3, then guarantee is limited to two years given the magnesium anode rod is replaced every six months.
- For stainless steel tanks: Guarantee is valid whereas the water in use has chlorine saturation 200 mg/l maximum ($c(Cl^-) < 200 \text{ mg/l}$)
- In areas where water has a saturation from 54 to 90 mg/l $CaCO_3$ it is recommended the use of water softener device to avoid calcium carbonate and other scale deposition. In case saturation is more than 90 mg/l $CaCO_3$ then installation of such device is mandatory.

General Terms:

1. Guarantee time is considered starting with installation and commissioning of the appliance.
2. Electric heating element and thermostat are covered for two year period.
3. Damages caused by calamity, force major, earthquake, extreme frost are not covered.
4. Damages caused by misuse, wrong installation, wrong electrical wiring are not covered.
5. Guarantee is not valid in case the appliance is installed or serviced by unauthorized personnel.
6. All parts used for maintenance and/or repair should be Original Thermic Parts or approved equivalent.
7. Secondary damages caused by water leaks etc. are not recognized.
8. Claims are not covered if the guarantee document is not filled and copy sent to the manufacturer and/or the authorized local distributor or reseller.
9. Guarantee is not valid if scheduled maintenances are not performed.
10. Scheduled maintenances table below should be filled and signed. Additional proof (e.g. labor Invoice) might be asked.
11. Guarantee is not valid if the used water's salinity does exceed 500 ppm
12. The time validity of the guarantee is not renewed after possible repair within the covered period
13. The guarantee is limited to the defective parts replacement and/or repair labor cost if any. Secondary losses or damages are not covered.
14. Transportation costs for defective materials, traveling and accommodation for technicians are not covered.
15. If continuous high temperatures are expected, due either to oversizing of collectors for the actual location or location's climatic data, on the primary (solar) circuit, the use of thermostatic relief valve is mandatory (not included in the SWH set). Guarantee is not valid if not installed.
16. **The scheduled maintenances are mandatory for the validity of the guarantee.**

Purchasing and installation date:

	Date	Technician data and signature
1 st maintenance		
2 nd maintenance		
3 rd maintenance		

	Date	Technician data and signature
4 th maintenance		
5 th maintenance		
6 th maintenance		

KEEP THIS DOCUMENT for FUTURE REFERENCE

MANUFACTURED BY:

THERMIC SPLLC

Loutsas & Mesologgiou str.

19600 MANDRA Industrial zone, ATHENS, GREECE.

TEL: +30 210 5555523 FAX: +30 210 5555668

www.thermicsol.com