


Geberit WC flush control with electronic flush actuation, mains operation, dual flush, actuator plate Sigma10, automatic/touchless/manual

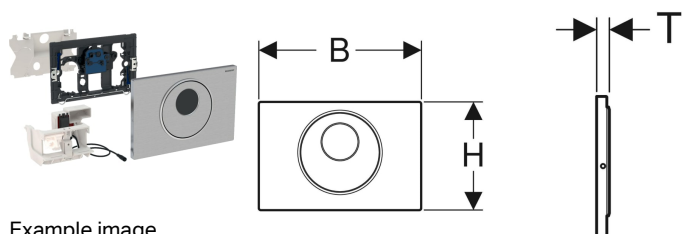

Example image

Application purposes

- For releasing a dual flush
- For solid and drywall construction
- For touchless flush actuation of Geberit Sigma concealed cisterns 12 cm
- Not suitable for use with Geberit inserts for in-cistern block
- Not suitable for barrier-free construction

Characteristics

- Touchless flush actuation for single or dual flush by moving hand toward sensor
- Manual flush actuation via actuator plate
- Screwable actuator plate
- Transformation of mains voltage to extra-low voltage, 4.1 V DC
- Operation with extra-low voltage, no mains voltage in cistern
- Interval flush preset

Scope of delivery

- Actuator plate Sigma10
- Mounting frame with infrared control, premounted
- Protection plate

- Adjustable interval flush
- Preflush can be set
- Minimum detection time can be set
- Compatible with Geberit Service Handy
- Functions can be set and queried with the Geberit Service Handy
- Vandal-resistant

Technical data

Protection degree	IP45
Nominal voltage	85-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Interval flush time, factory setting	1 s
Detection time, factory setting	7 s

To order additionally

- Geberit installation set for WC flush controls with electronic flush actuation

- Support block with servomotor and lifting device, premounted
- Actuator rod
- Fastening material

Art. no.	Colour / surface	Material designation	B	H	T
115.890.SN.5	Plate and button: brushed Design ring: polished	Stainless steel	24.6 cm	16.4 cm	1.5 cm