


Geberit urinal flush control with electronic flush actuation, battery operation, actuator plate made of plastic, Basic

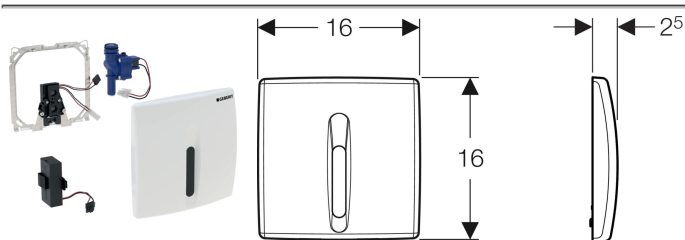

- For automatic flush actuation of urinals
- Cover plate with securing bar
- Adjustable interval flush
- Preflush can be set
- Warning when the battery is low
- Valve-closing function when battery is flat
- Device settings and operation with mobile device via integrated Bluetooth® interface (from 01/04/2022)
- Compatible with Geberit Control App from 01/04/2022
- Functions can be set and queried with the Geberit Service Handy

Battery type	Alkaline (1.5 V AA)
Protection degree	IP45
Operating voltage	3 V DC
Power consumption	< 0.5 W
Flow pressure	1-8 bar
Maximum test pressure, water	16 bar
Storage temperature	-20 – +70 °C
Detection time, factory setting	7 s
Flush time, adjustment range	3-15 s
Flush time, factory setting	7 s

- Cover plate with IR window
- Mounting frame
- Infrared control

- Solenoid valve
- 2 alkaline manganese batteries type AA 1.5 V
- Fastening material

Colour / surface	Material designation
115.818.11.5 white alpine	Plastic
115.818.46.5 matt chrome-plated	Plastic



- Only compatible with art. no. 115.801.00.5, 111.665.00.5 and 115.985.00.5