

TECHNICAL SHEET

TECHNICAL DEPT.



Edition date: 2016-01-07



MODEL: APLIQUE PANDORA S-3R CR AC-LED CII IP44 1X10W 458MM

CODE: E26485CI

DIMENSIONS OF PRODUCT:

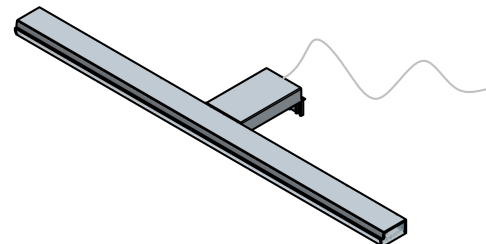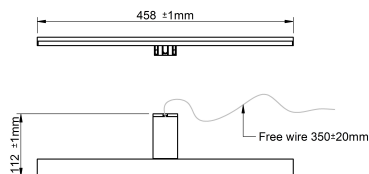

CRITERIA OF EXTERIOR ASPECT(RE-33033):


QUALITY OF POLISHED SURFACE:

SURFACES :


1- Support plate:



2- Top and side:



3- Front and bottom:



QUALITY SYMBOLS



NORMAL



GOOD



VERY GOOD

MATERIALS AND DECORATIONS:

Metal: Al/ABS Finish: Chrome

PC protector

FIXING TO SURFACE:

Wooden frame

BOXING

INSIDE	UNITS	MEASUREMENTS "mm"			WEIGHT "kg"	VOLUME "m3"	COMPONENTS
Box	1	0,035	0,12	0,465	0,24	0,001953	1 Applied 1 Bag with screws 2 Instruction sheet 1 Led module installed in luminaire
OUTSIDE							
Lot box	10	0,205 x 0,265 x 0,475			4,2	0,025804	10 Individual boxes by batch
Palet	540	1,995 x 0,8 x 1,2			251,8	1,915200	54 Industrial boxes x 10 individual

MANUFACTURING REQUIREMENTS:

Minimum of production: 500 Un.

Delivery time: 55 Working days

SPARE

E17843-Junction box 2P IP44;E26055EI-UTE

ELECTRIC POWER

Nominal voltage	Power	Lamp holder	Lamp		Connexion to network
220-240V~50/60Hz	MAX 1X10W	LED AC		A+	Using junction box 2P IP44

STANDARIZATION AND CLASSIFICATION

		IP44			
UNE-EN 60598				0,10m	

ILLUMINANCE AND LIGHT SOURCE

Light temp	life bulb	Lux		Direction of light
5700K	36000h	1) 1655		
	Lumens	2) 575		
	4) 1100	3) 205		

certificate n°	
WTF15F1036370X1S-LVD WTF15F1035194E- EMC	

ECO DESIGN	
	Ecological impact value
	0,667