


Geberit washbasin tap Brenta, wall-mounted, generator operation, for concealed function box

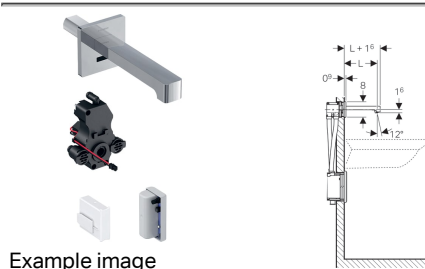

Application purposes

- For extracting tap water
- For public and semipublic areas
- For installation in Geberit elements for washbasins, wall-mounted tap with concealed function box
- For connecting cold and hot water (only for model with mixer or thermostatic mixer)
- For connecting cold or mixed water (only for model without mixer)
- For use with stainless steel bowls
- For a flow rate of > 3 l/min
- Model with mixer or thermostatic mixer not suitable for continuous flow heater
- For panelling thickness 10–50 mm

Characteristics

- Tap group I in accordance with DIN 4109
- Automatic flush actuation
- Infrared user detection
- Self-adjusting IR sensor
- Vandal-resistant
- Volume flow control via tap aerator
- Temperature presetting via mixer (only for model with mixer or thermostatic mixer)
- Not possible to set just hot water or just cold water (only for model with mixer or thermostatic mixer)
- Power supply from generator and rechargeable battery
- Self-sustaining power supply
- Warning when rechargeable battery capacity is low
- Economy mode can be set
- Water saving due to quick-response two-beam scanning technology
- Functions can be set and queried with the Geberit Service Handy
- Water saver program can be set
- Interval flush program can be set
- Continuous flush can be set individually
- Flush actuation can be deactivated via Geberit Clean Handy
- Various functions can be set manually

- With integrated check valve
- When used at least 20 times per day on average for a duration of 4 s each, the washbasin tap works in a self-sustaining manner
- Functional unit with built-in basket filters

Technical data

Protection degree	IPX4
Operating voltage	3.2 V DC
Operating pressure	2-10 bar
Differentiated pressure CW/WW	≤ 1.5 bar
Maximum test pressure, water	16 bar
Maximum test pressure, air / inert gas	3 bar
Storage temperature	-20 – +70 °C
Maximum operating temperature, water, short-term	90 °C
Flow rate at 3 bar	5 l/min
Interval flush time, factory setting	5 s
Product material	Brass chrome-plated / plastic

Scope of delivery

- Washbasin tap
- IR sensor with connection cable
- Control electronics
- Functional unit
- Rechargeable battery for generator operation
- Tap aerator key
- Fastening material

To order additionally

- Geberit element for washbasin
- Cover plate

Art. no.	Colour / surface	Mixer	L
116.275.21.1	bright chrome-plated	without mixer	17 cm
116.276.21.1	bright chrome-plated	with mixer	17 cm
116.295.21.1	bright chrome-plated	without mixer	22 cm

Art. no.	Colour / surface	Mixer	L
116.296.21.1	bright chrome-plated	with mixer	22 cm