

scratchkit



- 3 ISTRUZIONI D'USO
- 7 INSTRUCTIONS FOR USE
- 11 NOTICE D'UTILISATION

APPLICATION

1. Cleaning and preparation of the surface

Clean the surface by using the specifi detergente **SCRATCH CLEANER**. The product should be used pure or diluted depending on the type of dirt and material resistance:

- If used as degreaser cleaner to remove foot-traffic soil, stubborn and old dirt dilute the product at 20-30% with water (1 part of product in 2/4 parts of water).
- If used as simple detergent to clean the slab before the restoration dilute the product at 10% with water (1 part of product in 9 parts of water).

Before using the product on the whole surface make a preliminary test on a small area. For resistant materials, after the test, the product may be used undiluted.

Pour the cleaner directly upon the surface and by using the **WHITE PAD** rub to help the cleaning action of the product. For more difficoult residues leave the product acting for a longer time or use it with an higher concentration.

2. Rinse

By using a paper towel or a cloth remove the washing residues and rinse very well with clean water untill all the residues upon the surface are removed. In the end wipe the water and let the surface dry.


3. Application area masking

During the application of the restoration tretment some splash of product may occour due to the rotatory movements of the application tool. Those splashes could be easly remvod from non-absorbent surfaces with a wet cloth at the end of the operations. However we suggest to protect adjacent surfaces by using plastic films, masking tapes or other suitable systems.

(a)

4. Scratch restoration

- Choose the proper restoration product based on the colour of the surface. For white and light coloured materials use SCRATCH LIGHT, for black or dark coloured materials use SCRATCH DARK.
- Install the SCRATCH PAD pad on the polisher.
- Shake well the bottle (a) and pour some drops of product directly upon the surface. As an indication is necessary to cover the scratch, for all its length, with the drops of product. (b)
- With out turning on the polisher, distribute the product on the surface by using the SCRATCH PAD Pad.
- Turn on the polisher and start brushing the product on the surface with linear movements that follows the direction of the scratch. (c) Do not apply too much pression on the tool: in this phase is sufficient to follow the movement of the tools, taking care of working by using all the flat surface of the SCRATCH PAD pad. Is enough to work just on the scratched area.
- Proceed with the brushing of the surface untill the product is completely dry on the surface
- If on the adjacent surface are visible some product residues, those will be easily removed once the application is over. It is important to brush only in the scratched area. (d)

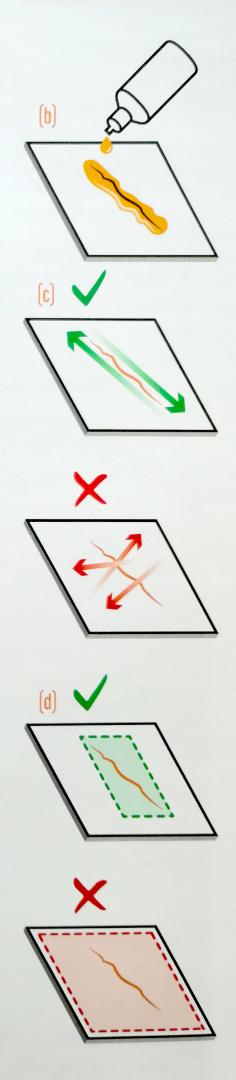

• When the product is completly dry on the surface evaluate the obtained result. If the scratch should be still visible, repeat the application by following the same instructions. The number of applications necessary to have a full restoration depends from the depth and wide of the scratch. Generally, as an indication, 3-5 applications are enough to have a satisfactory result, howevere for deeper or wider scratches is possible to make all the application necessary for a full restoration.

5. Final rinse

Once the desired result is obtained rinse well with clean water and rub the surface with WHITE PAD to remove product residues and splashes. In the end wipe the surface with a paper towel or a cloth. If on the surface should be still visible some stubborn residues of product, buff them with a dry SCRATCH PAD pad, without using any product.

